



技术参数 SPECIFICATIONS







间距 (Pitch): 0.5
极数 (Poles): 4~60
额定电压 (Voltage rating): 50V DC/AC
额定电流 (Current rating): 0.5A DC/AC
耐压值 (Withstand Voltage): 500V
工作温度 (Working Temperature): -25℃~+85℃
绝缘电阻 (Insulation Resistance): $\geq 500M\Omega$
接触电阻 (Contact resistance): $\leq 30m\Omega$
单面接触 (Single contact)

材料 Material

接触件 (Contact): 磷青铜 $t=0.2mm$ 镀亚锡
焊片 (solder tab): 磷青铜 $t=0.2mm$ 镀亚锡
塑胶主体 (Housing): LCP 耐热树脂
(UL94V-0) Heat resistance plastic
锁条 (Slider): PPS 耐热树脂
(UL94V-0) Heat resistance plastic

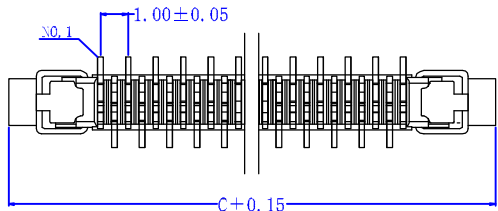

备注: “D” 处尺寸, 4~36P 为 4.6mm; 37~60P 为 5.2mm

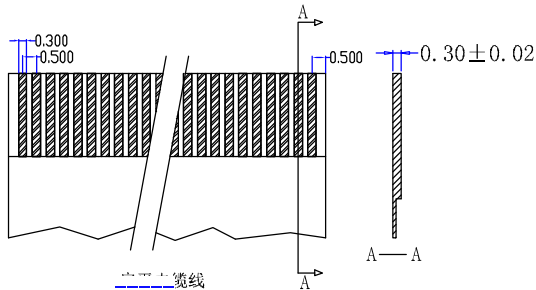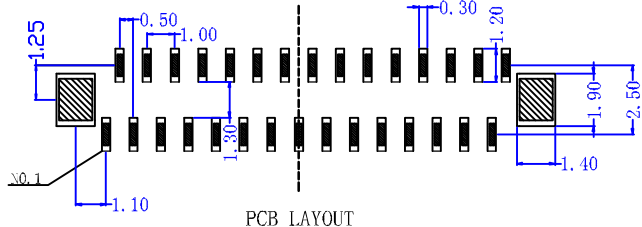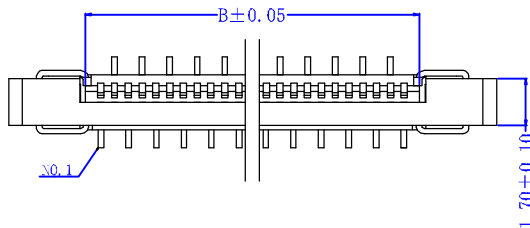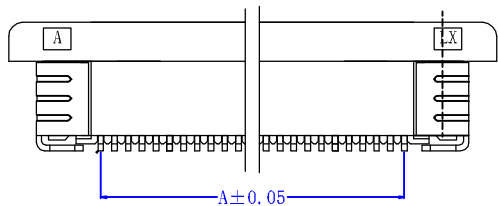

产品名称	FFC 连接器	文件编号	JS-CP-007	页次	1/1	绘制比例	1: 1	Shenzhen Jiatel Hardware Electronics Co.,Ltd	
产品型号	0.5S-6-nPB	文件版本	B/1	单位	mm	图样标记			
文件版本	更新标记	更新内容		经办/日期	批准/日期	.X ±0.20	.X* ±3°	制作/日期	陶龙阵 2019.03.09
						.XX ±0.10	.X* ±2°	校对/日期	季育生 2019.03.09
						.XXX ±0.05	.XX* ±1°	审核/日期	陶龙阵 2019.03.11
						线性尺寸	角度尺寸	批准/日期	吴天明 2019.03.11