

技术参数 SPECIFICATIONS

间距 (Pitch): 0.5

极数 (Poles): 4~60

额定电压 (Voltage rating): 50V DC/AC

额定电流 (Current rating): 0.5A DC/AC

耐压值 (Withstand Voltage): 500V

工作温度 (Working Temperature): -25℃~+85℃

绝缘电阻 (Insulation Resistance): $\geq 500M\Omega$

接触电阻 (Contact resistance): $\leq 30m\Omega$

单面接触 (Single contact)








材料 Material

接触件 (Contact): 磷青铜 $t=0.2mm$ 镀亚锡


焊片 (solder tab): 磷青铜 $t=0.2mm$ 镀亚锡

塑胶主体 (Housing): LCP 耐热树脂 (UL94V-0) Heat resistance plastic (UL94V-0)

锁条 (Slider): PPS 耐热树脂 (UL94V-0) Heat resistance plastic (UL94V-0)

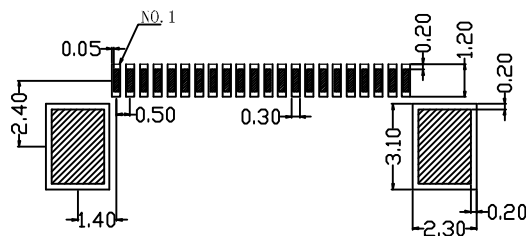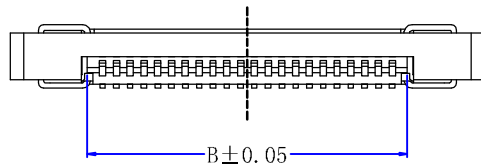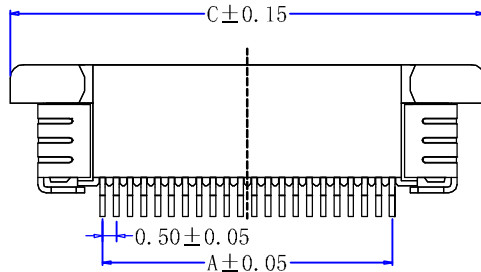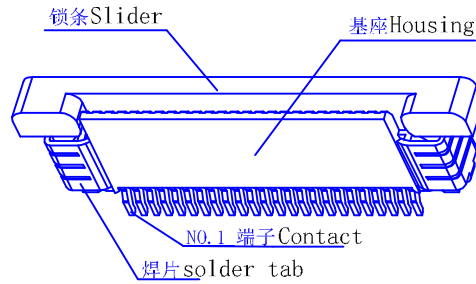

PCB LAYOUT

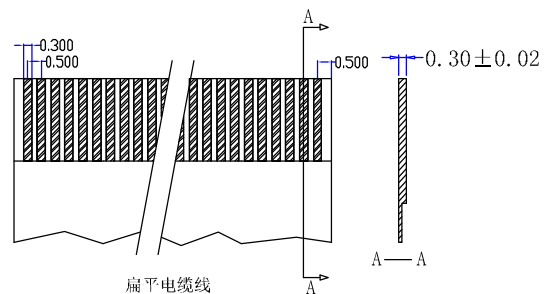

扁平电缆线

产品名称	FFC 连接器	文件编号	JS-CP-008	页次	1/1	绘制比例	1: 1	Shenzhen Jiatel Hardware Electronics Co.,Ltd	
产品型号	0.5S-6X-nPWB	文件版本	B/1	单位	mm	图样标记			
文件版本	更新标记	更新内容			经办/日期	批准/日期	.X ±0.20	.X° ±3°	制作/日期 陶龙阵 2019.03.09
							.XX ±0.10	.X° ±2°	校对/日期 李育生 2019.03.09
							.XXX ±0.05	.XX° ±1°	审核/日期 陶龙阵 2019.03.11
							线性尺寸	角度尺寸	批准/日期 吴天明 2019.03.11