
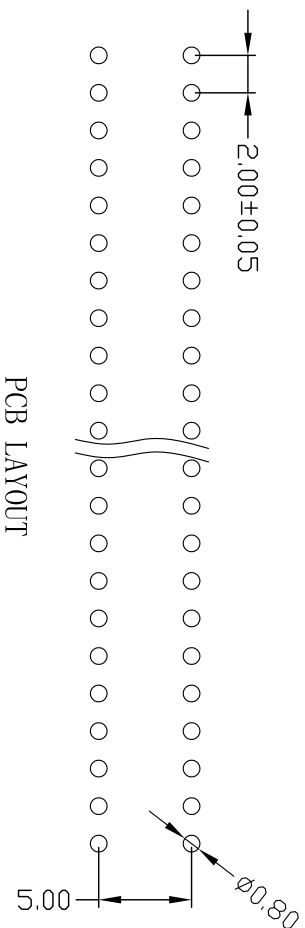
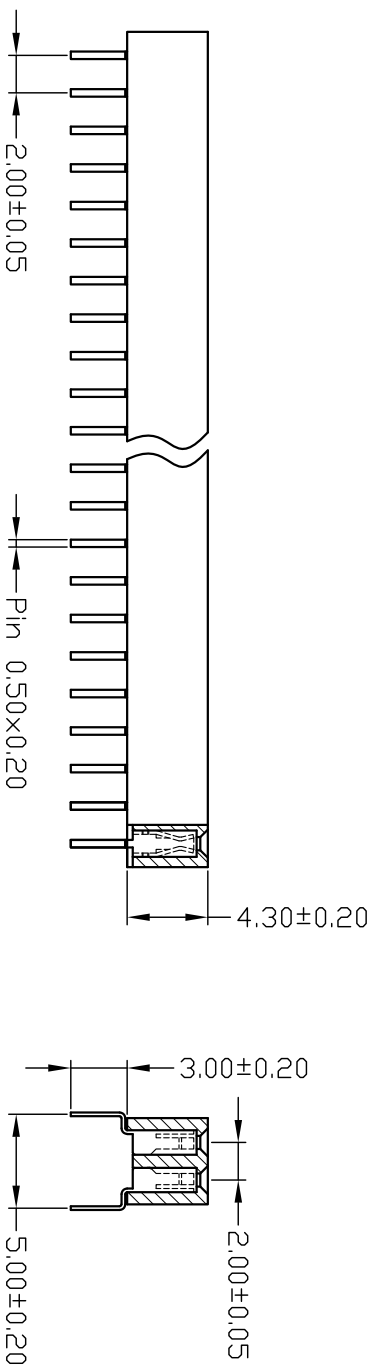


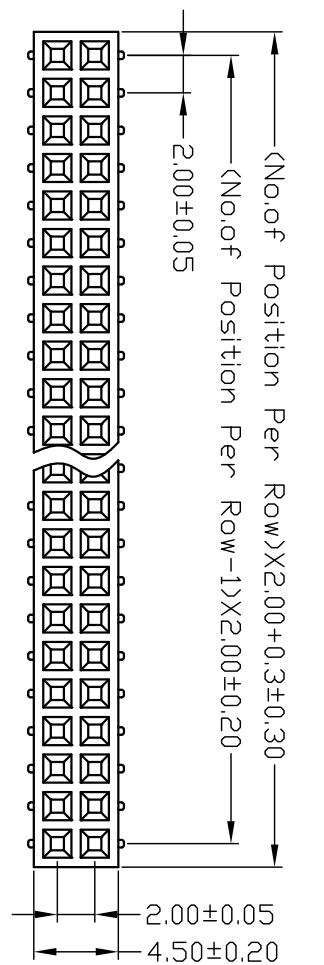

PCB LAYOUT

SPECIFICATIONS

Current Rating:2.0AMP
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Withstand Voltage:500V AC/minute
Operation Temperature:-40℃ to +105℃
Contact Material:Phosphor Bronze
Contact Plating:Au over 50 μ "Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T

E		Units		Scale		Drawing By Wei Peng		Shenzhen Jiatel Hardware Electronics Co., Ltd			
D		Tolerance Unless		Date		Check By Hai Gao		Date		www.jiatel.com	
C		Otherwise Specified		Date		Sheet 1 of 1		Title		2.0*4.3 Bottom Entry, Double Row	
B		.X ~ ±0.30		Date		Approval By EircZhang		Thirt Angle Projection		Drawing Nd. 2242XX1B141	
A		.XX ~ ±0.25		Date		File Path		REV		A	
REVZONE LTR		.XXX ~ ±0.20		Date		Angle ~ ± 3°		6		7	
1		2		3		4		5		8	