

REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

a.HOUSING:PBT UL94V-0

b.CONTACT:BRASS

(SURFACE PLATING: Sn100u"-120u")

SEE ORDERING INFORMATION


2.ELECTRIC:

a.CONTACT RESISTANCE: 30 MILLIOHMS MAX

b.INSULATION RESISTANCE: 1000 MEGA OHMS MIN

c.DIELECTNIC VOLTAGE: 500V AC ONE SEC LEVEL

d.OPERATING TEMPERATURE: -25°C~ +85°C

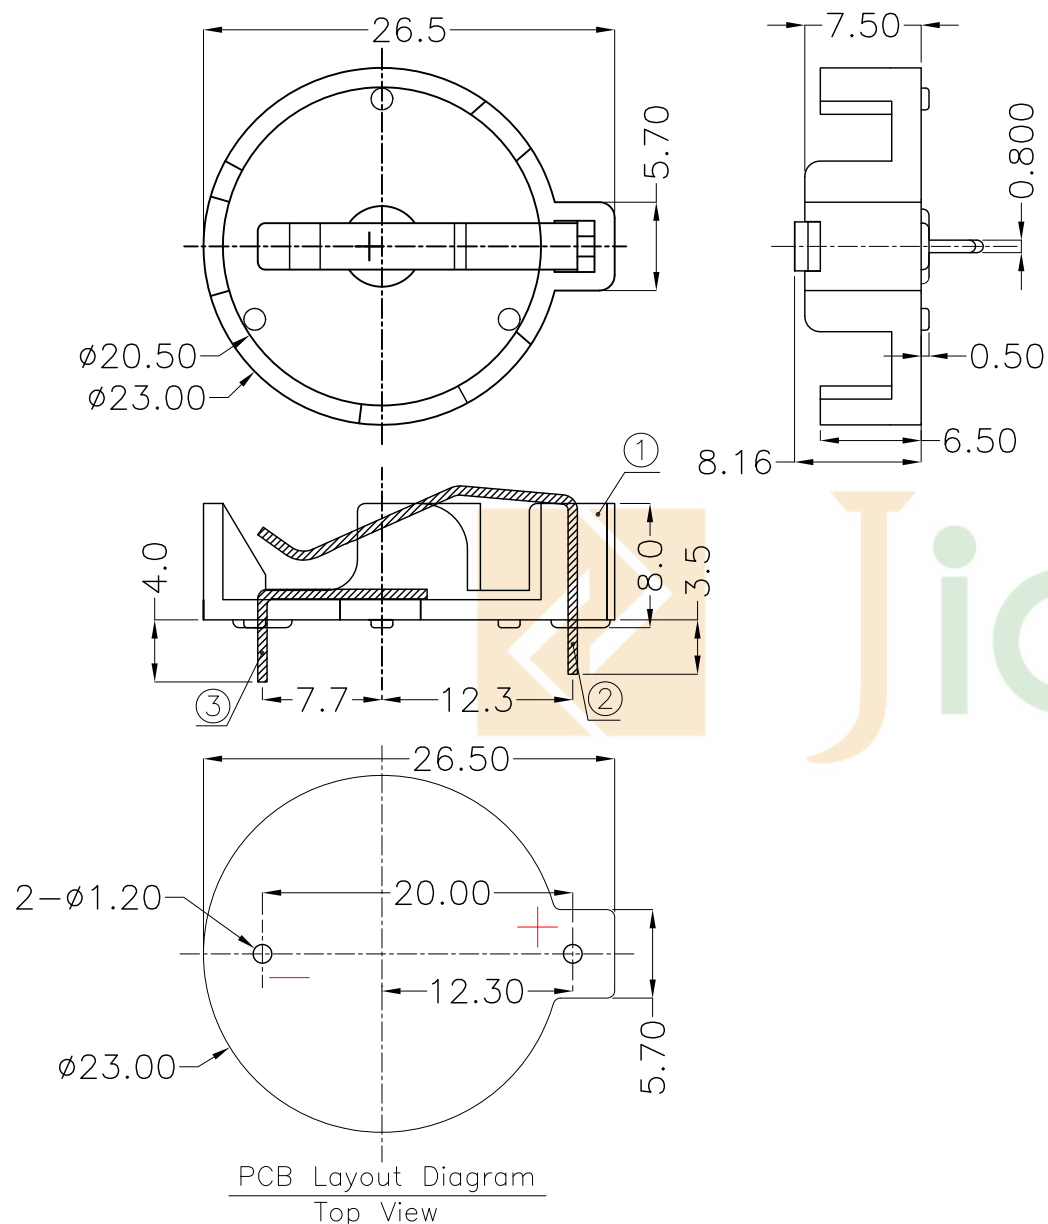

UNLESS OTHERWISE SPECIFIED TOLERANCES		Shenzhen Jiatel Hardware Electronics Co.,Ltd www.jiatel.com					
DECIMALS: X :±0.30 X.X :±0.25 X.XX :±0.20 X.XXX :±0.10		ANGLES: X :±1° X.X :±0.5°	DSND	Wei Peng	DATE	2017-07-16	TITLE:
			CHKD	Hai Gao	DATE	2017-07-16	BH-2CR2032-7 DIP
			APVD	Eric Zhang	DATE	2017-07-16	PART NO.:
WEIGHT: 1.8g			SCALE: 2:1	SIZE: A4	VIEW: 		JT-BH2032-7
SHEET 1 OF 1			UNIT: mm	REV.: A/0	OBJECT: JT		DRAW NO.:WD-CP-0020

NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR
3	TERMINAL(-)	1	BRASS, T=0.60mm	Sn-Plating
2	TERMINAL(+)	1	BRASS, T=0.60mm	Sn-Plating
1	HOUSING	1	PBT	BLACK