


1		2		3		4		5		6		7		8	
版 次		修 改		内 容		日 期									
A/1				版次和编号		2009-11-25									

料号编码原则:






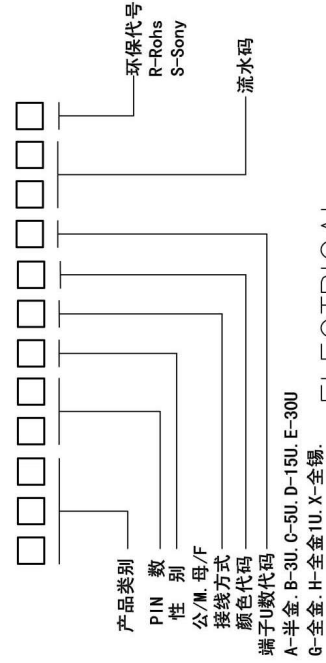


ELECTRICAL

Current rating:1Amp
Dielectric withstanding voltage:
AC 500v min(for 1 minute)
Insulation resistance:
50MΩ min(at 500v DC)
Contactresistance:
35mΩ max
Working Temperature:
-50℃~+105℃

MECHANICAL

Insulator material:
PBT&glass-fiber reinforced UL 94v-O
Plastic Color:Black or White
Contact: Brass
Shell:nickel(or tin,gold)plated
Number of contact:04.
Durabil tty: 2500cycles

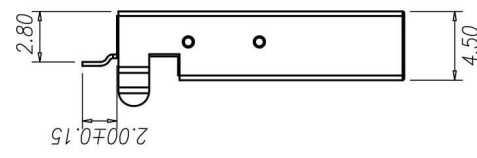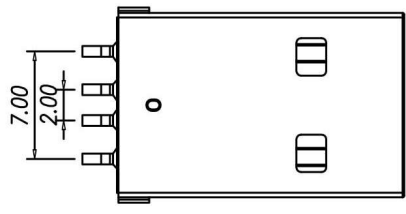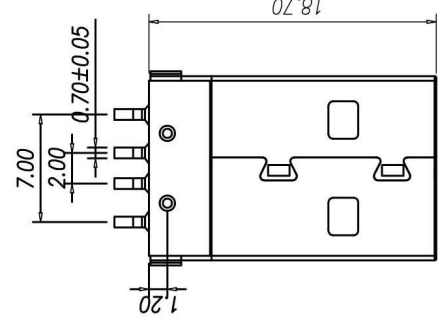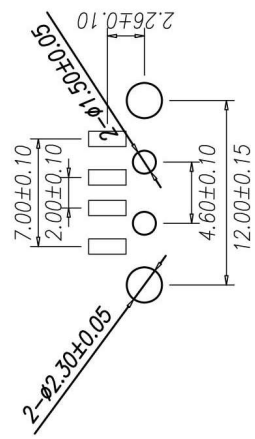

Shenzhen Jiatel Hardware Electronics Co.,Ltd www.jiatel.com														
COMMONLY			DWG NO	CP-U06	SCALE 1:1	APPROVE								
TOLERANCES				CUB04MTWA02R	UNIT	mm								
X.XXX ±0.05														
X.XX ±0.15														
X.X ±0.20														
X ±0.25														
ANGLE ±2°			TITLE	USB A公 SMT180°	REV	A/1								
3RD.ANGLE'S				贴板式	SHEET	1/1	DARW	1uozhonggru						
									8					