

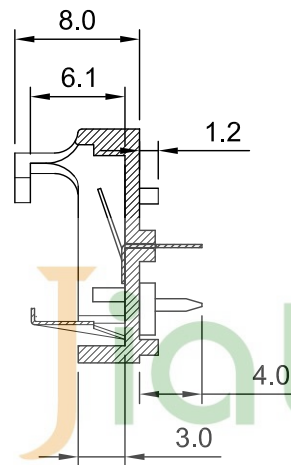


REV	DESCRIPTION	DATE
A0	INITIAL RELEASE	2016/03/06

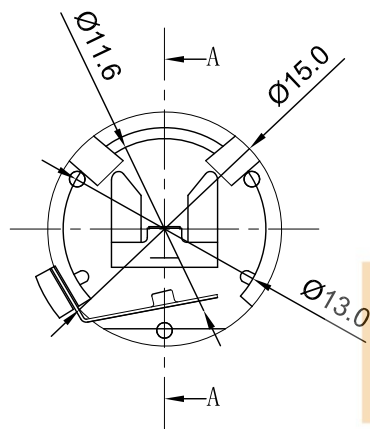

SECTION A-A

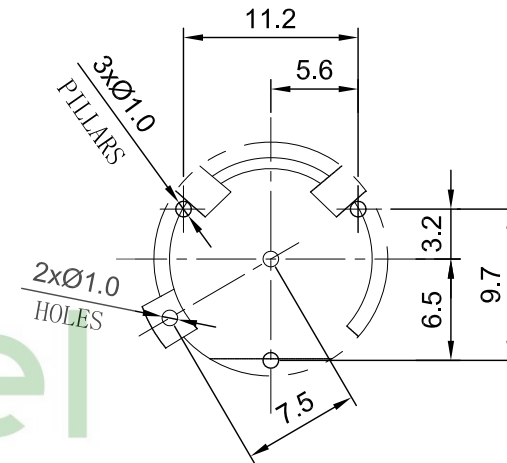

PCB Mounting Layout

NOTES:

1. MATERIAL:

- a. Base: PBT UL94V0, Black color
- b. Contact: Phosphor bronze, Tin plated

2. ELECTRIC:

- a. Current rating : 1A DC
- b. Voltage rating : 12V DC max
- c. Contact resistance: 30mΩ max
- d. Insulation resistance: 1000MΩ min
- e. Withstanding voltage: 500V(50HZ) AC/minute
- e. Operating temperature: -25° ~ +85°
- f. Humidity: 40° C and 90-95% RH for 96 hours

3. RoHS COMPLIANT

Shenzhen Ji at el Hardware Electronics Co., Ltd

UNLESS OTHERWISE SPECIFIED TOLERANCES		MATERIAL: SEE NOTES	DESIGN BY Zhang jianbing	DATE 2016/03/06	TITLE BATTERY HOLDER	
		FINISH: SEE NOTES	CHECKED BY Wang quchun	DATE 2016/03/06		
			APPROVED BY Zhu changyan	DATE 2016/03/06	DWG NO. LR44D011	REVISION A0
		these drawings and specifications are the property of MQC, are Issued in strict confidence and shall not be reproduced, or copied, or used as the basis for the manufacture, or sale of apparatus without prior written permission				
		UNIT MM	SCALE 2:1	SHEET 1 OF 1		