

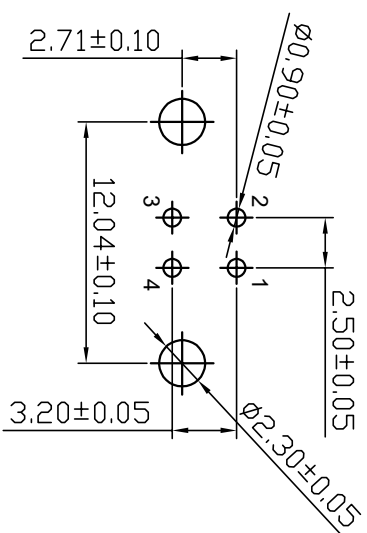
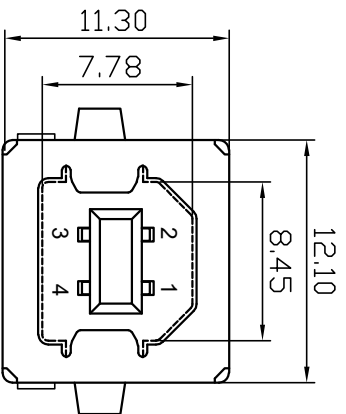


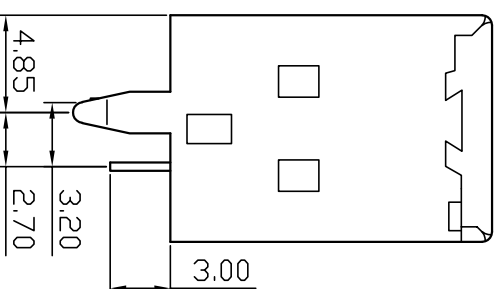

Recommended P.C. Board Layout

Electrical Data-
 Current rating: 1Amp max
 Dielectric Withstanding: 750VAC for one minute
 Contact Resistance: <30mΩ
 Insulation Resistance: 1000mΩ
 Operating Temperature: 0°C ~ +40°C

Construction-
 Hole through type insulator: Class Filled Polyester
 Surface mount type insulator: High remperature plastic
 Flammability Rating: UL 94V-0
 Contacts: Copper ALLOY
 Plating options: Selective Gold on surface contact area
 Please see plating code for other options

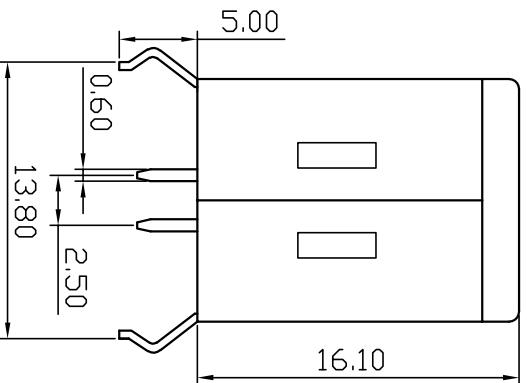

E				Units	mm	Scale	4:1	Drawing By	Date	Shenzhen Jiatel Hardware Electronics Co.,Ltd				
D				Tolerance Unless				Reviewed By	Date	Date	2018/10/13	Title	USB B/F(180°)	
C				Otherwise Specified						Sheet	1 of 1			
B				.X ~ ±0.30				Approval By	Date	Third Angle Projection				
A				.XX ~ ±0.25						Drawing No.		JT-USB-B-F-S-001		REV
REV				.XXX ~ ±0.20				Angle ~ ± 3°		F/Name		S/E/WD/USB		A
				ECN.NO.				Date		F/Name		S/E/WD/USB		A