
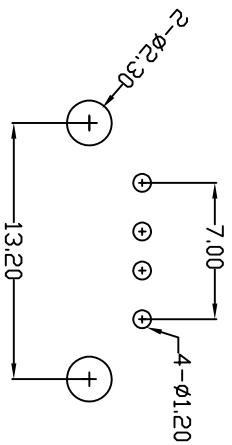
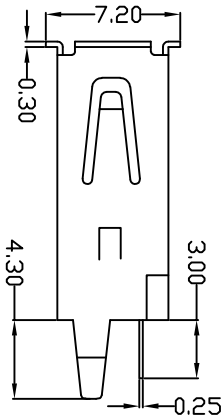
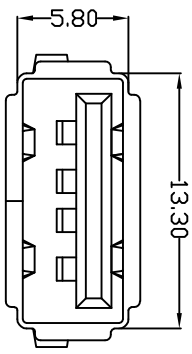


ELECTRICAL DATA:
Current rating: 1Amp max
Dielectric Withstanding: 750VAC for one minute
Contact Resistance: <30mΩ
Insulation Resistance: >1000mΩ
Operating Temperature: 0°C~+40°C

CONSTRUCTION:
Hole through type insulator: Class Filled Polyester
Surface mount type insulator: High temperature plastic
Flammability Rating: UL 94V-0
Contacts: Copper Alloy
Plating options: Selective Gold on surface contact area
Please see plating code for other options

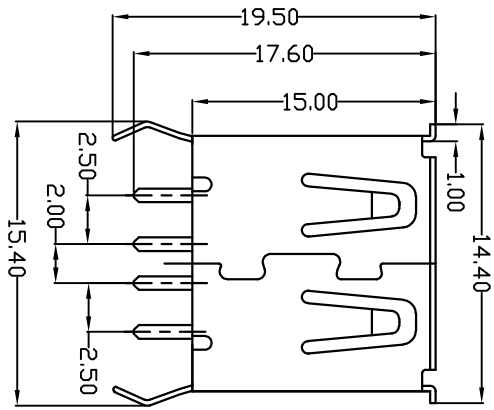

PCB LAYOUT

E						Units	mm	Scale	2:1	Drawing By		Shenzhen Jiatel Hardware Electronics Co.,Ltd							
D						Tolerance Unless Otherwise Specified				Date		Date	2008/04/02	Title	USB/180度插板式 (全包)				
C										Check By						Sheet 1 of 1	Drawing No.	JT-USB-AF-026	REV
B						.X ~ ±0.30				Date									
A						.XX ~ ±0.25 .XXX ~ ±0.20				Approval By									
REV	ZONE	LTR				ECN.NO.				Date		Angle ~ ± 3°		Thirt Angle Projection	File Path	M/F/MA/GCTZ/USB	A		
1		2		3		4		5		6		7						8	
		DESCRIPTION.																	