


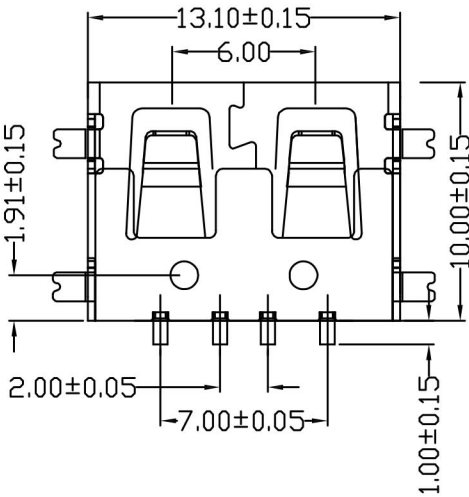
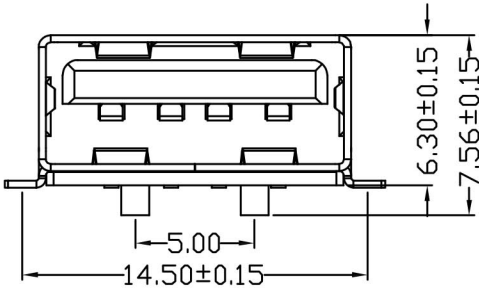


版次	ECN. NO.	修 改 内 容	日 期	修改人
A		NEW	2020-05-07	PanSon

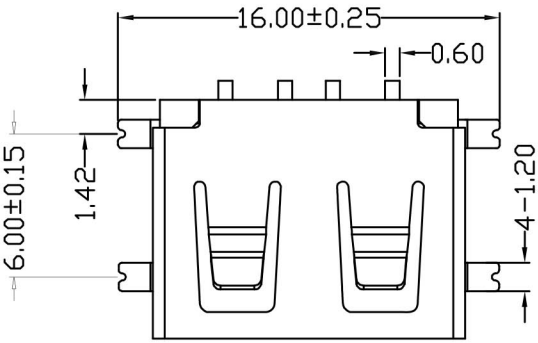

- NOTES:
- 1.HOUSING: SEE NOTES, UL94V-0 .
TERMINAL: SEE NOTES.
SHELL: SEE NOTES.
- SPECIFICATION:
- 1.ELECTRICAL CHARACTERISTIC:
CONTACT RESISTANCE: 30MΩ MAX
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1MIN
INSULATION RESISTANCE: 1000MΩ MIN
 - 2.MECHANICAL CHARACTERISTIC:
INSERTION FORCE: 35N(3.57KGF) MAX
EXTRACTION FORCE: 10~35N(1.02~3.57KGF)MIN
DURABILITY: 1500 CYCLES EXTRACTION FORCE:10~35N
5000 CYCLES MIN
5000 CYCLES EXTRACTION FORCE:3~35N
 - 3.ENVIRONMENTAL:
OPERATING TEMPERATURE: -55℃+85℃

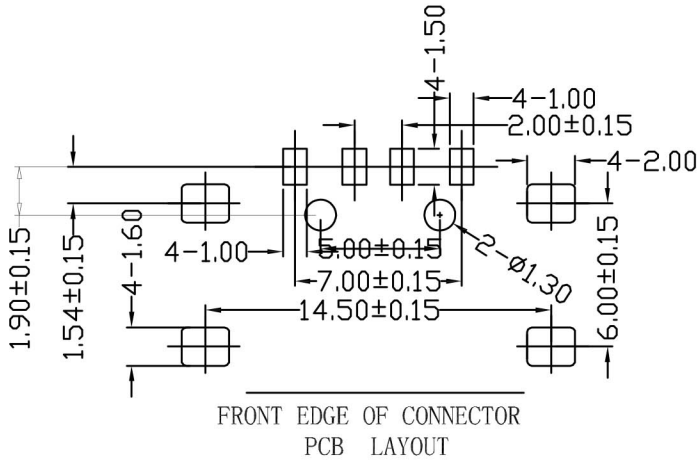

DIM	TOL
X.	±0.35
X.X	±0.25
X.XX	±0.20
X.XXX	±0.15
X°	±5.0°
X.X°	±4.0°
X.XX°	±3.0°
X.XXX°	±2.0°

Shenzhen Jiatel Hardware Electronics Co.,Ltd

产品名称 (TITLE): USB AF 四脚全贴 带柱6.4无卷边

料号 (Supplie P/N): 04F-008X

绘图 (Designed)

审核 (Checked)

批准 (Approved)

图号 (DWG NO.): UA-008

PanSon

D.J.JIE



第三角视

SCALE

图 NONE

SHEET

1/1

REV.

A

UNITS

mm