


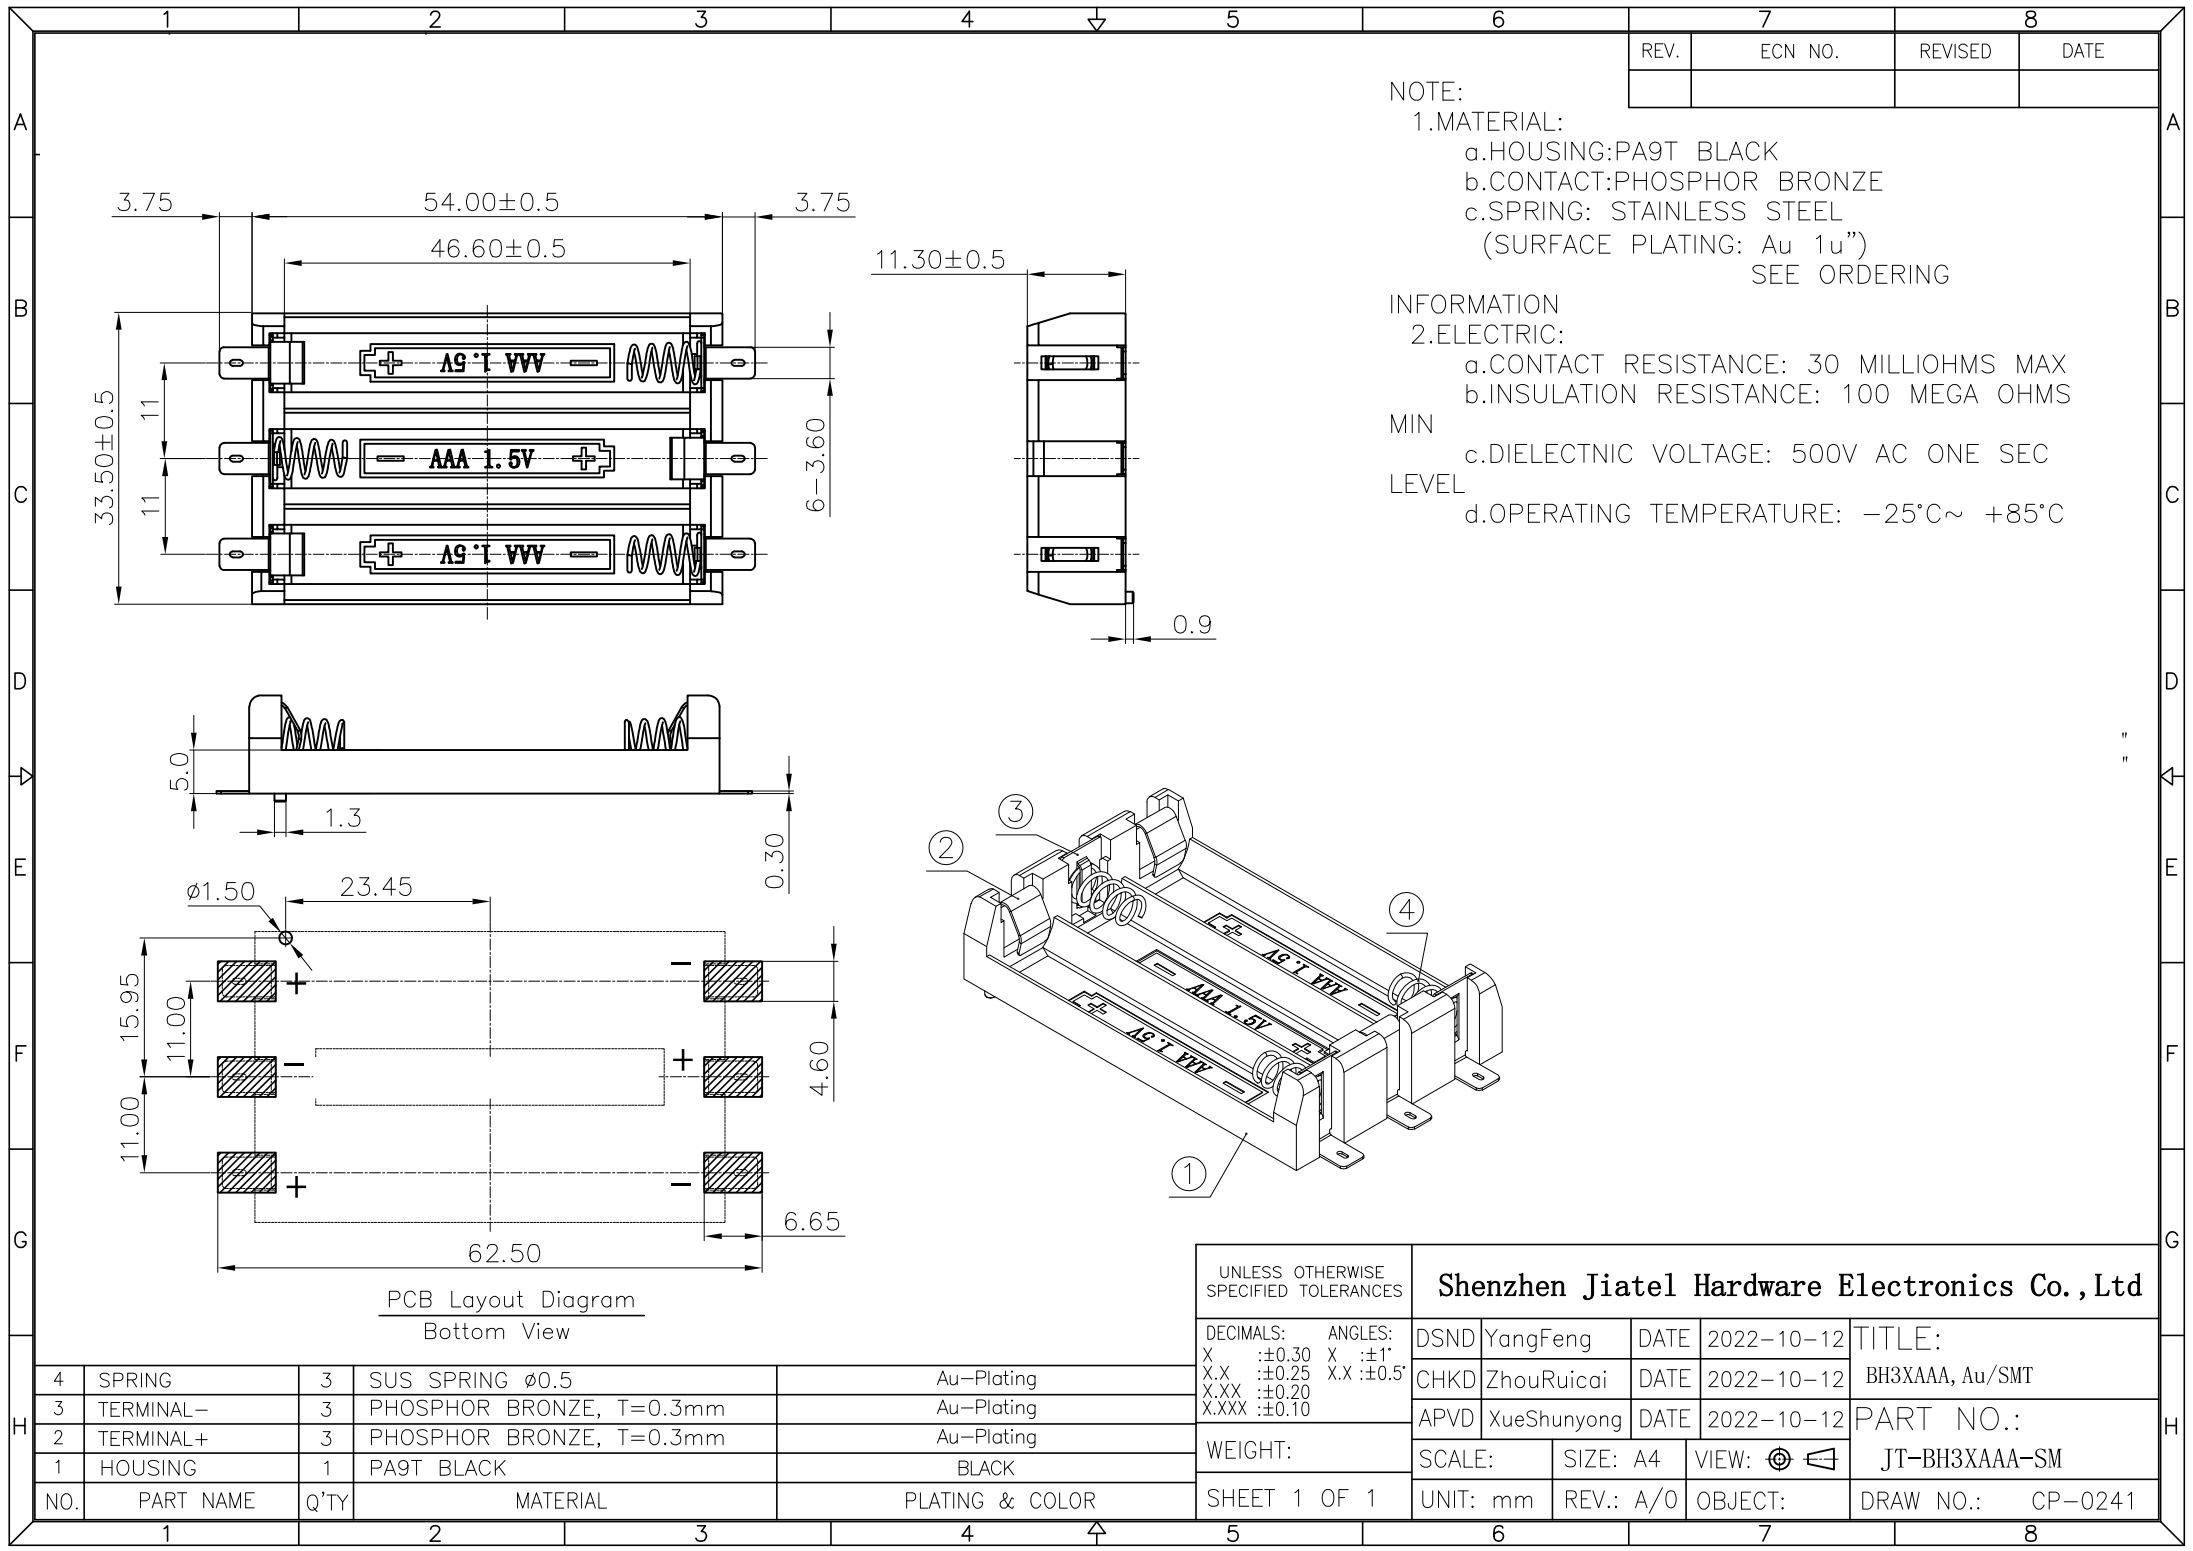

NOTE:
1.MATERIAL:
a.HOUSING:PA9T BLACK
b.CONTACT:PHOSPHOR BRONZE
c.SPRING: STAINLESS STEEL
(SURFACE PLATING: Au 1u")
SEE ORDERING

INFORMATION
2.ELECTRIC:
a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS
MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE SEC
LEVEL
d.OPERATING TEMPERATURE: -25°C~ +85°C

PCB Layout Diagram
Bottom View

4	SPRING	3	SUS SPRING $\phi 0.5$	Au-Plating
3	TERMINAL-	3	PHOSPHOR BRONZE, T=0.3mm	Au-Plating
2	TERMINAL+	3	PHOSPHOR BRONZE, T=0.3mm	Au-Plating
1	HOUSING	1	PA9T BLACK	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Shenzhen Jiatel Hardware Electronics Co.,Ltd					
DECIMALS: X.X : ± 0.30 X.X.X : ± 0.25 X.XXX : ± 0.10	ANGLES: X : $\pm 1^{\circ}$ X.X : $\pm 0.5^{\circ}$	DSND	YangFeng	DATE	2022-10-12	TITLE:	
		CHKD	ZhouRuicai	DATE	2022-10-12	BH3XAAA, Au/SMT	
		APVD	XueShunyong	DATE	2022-10-12	PART NO.:	
		WEIGHT:		SCALE:	SIZE: A4	VIEW:	$\odot$ $\triangleleft$
		SHEET 1 OF 1		UNIT: mm	REV.: A/0	OBJECT:	DRAW NO.: CP-0241