


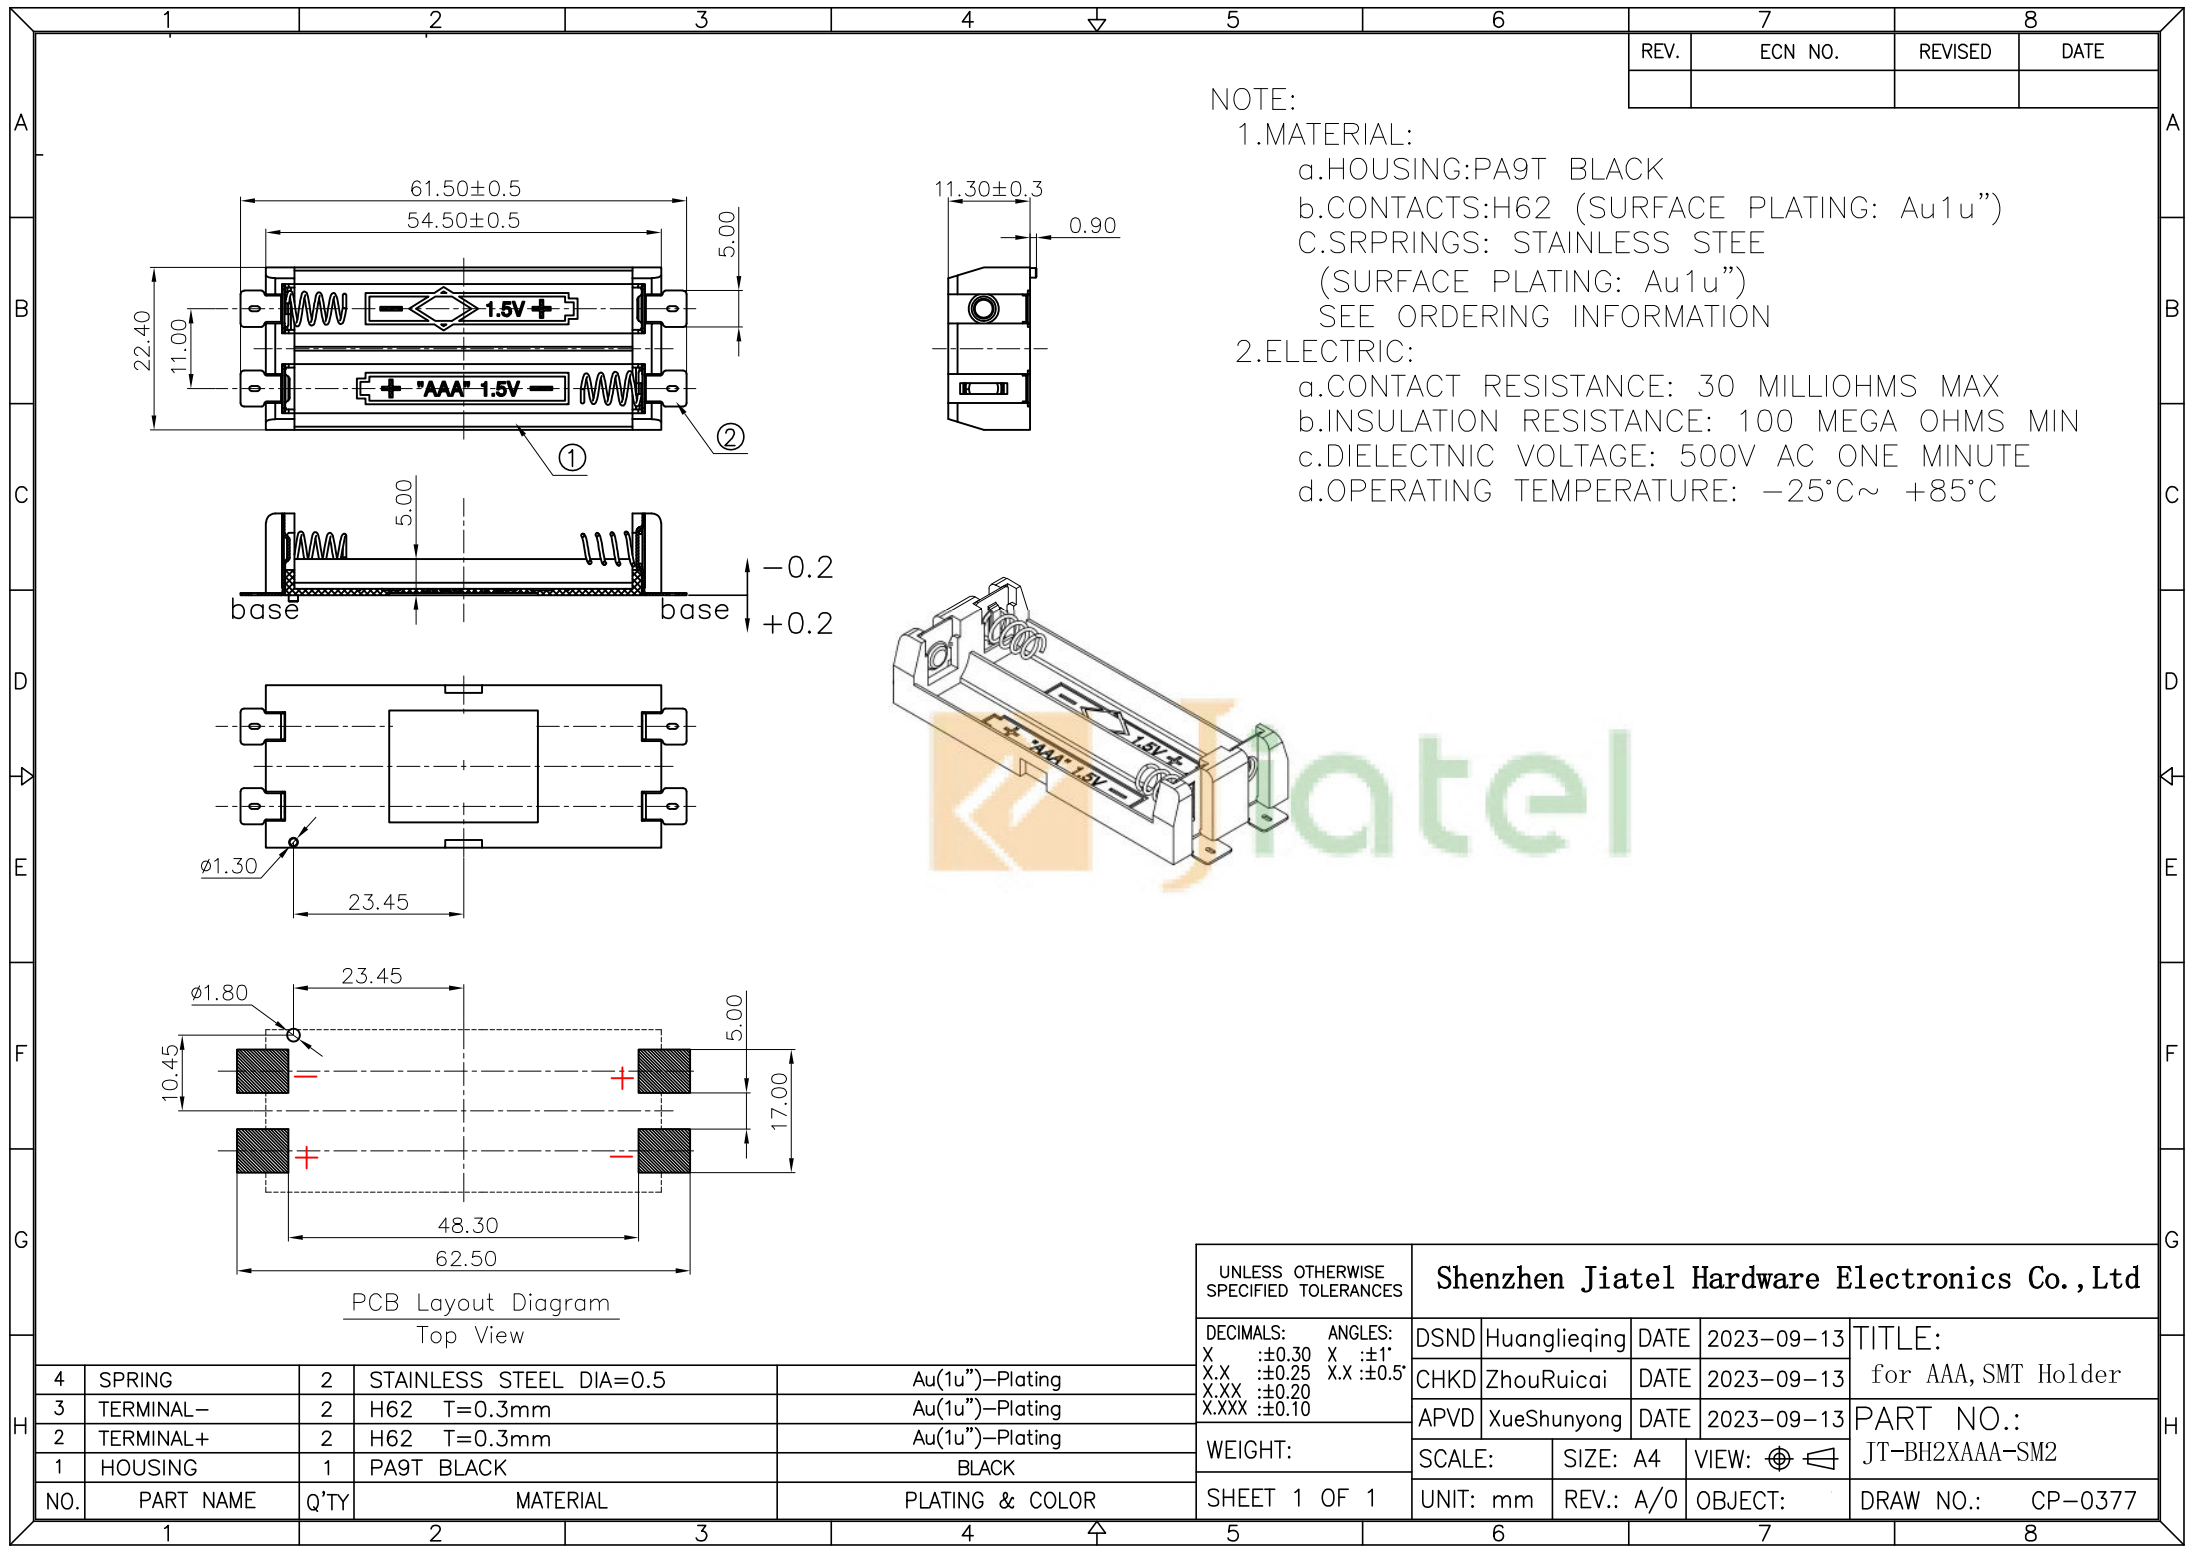

NOTE:

1.MATERIAL:

- a.HOUSING:PA9T BLACK
- b.CONTACTS:H62 (SURFACE PLATING: Au1u")
- c.SRPRINGS: STAINLESS STEE (SURFACE PLATING: Au1u")
- SEE ORDERING INFORMATION

2.ELECTRIC:

- a.CONTACT RESISTANCE: 30 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
- d.OPERATING TEMPERATURE: -25°C~ +85°C

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X :±0.30 X :±1°
X.X :±0.25 X.X :±0.5°
X.XX :±0.20
X.XXX :±0.10

WEIGHT:

SHEET 1 OF 1

Shenzhen Jiatel Hardware Electronics Co.,Ltd

DSND	Huanglieqing	DATE	2023-09-13	TITLE:
CHKD	ZhouRuicai	DATE	2023-09-13	for AAA, SMT Holder
APVD	XueShunyong	DATE	2023-09-13	PART NO.:
SCALE:	SIZE: A4	VIEW:	⊕	JT-BH2XAAA-SM2
UNIT: mm	REV.: A/0	OBJECT:		DRAW NO.: CP-0377

4	SPRING	2	STAINLESS STEEL DIA=0.5	Au(1u")-Plating
3	TERMINAL-	2	H62 T=0.3mm	Au(1u")-Plating
2	TERMINAL+	2	H62 T=0.3mm	Au(1u")-Plating
1	HOUSING	1	PA9T BLACK	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR