

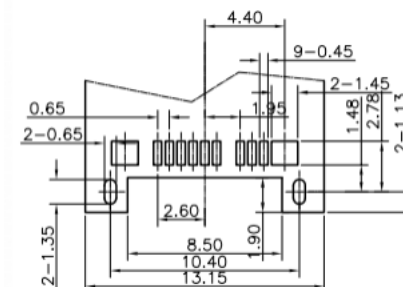








RoHS
Compliant

REV.	ZONE	DESCRIPTION	DESIGN	DATE
B		NEW		



RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

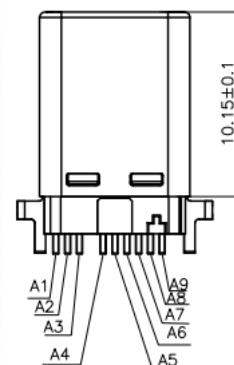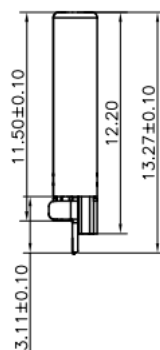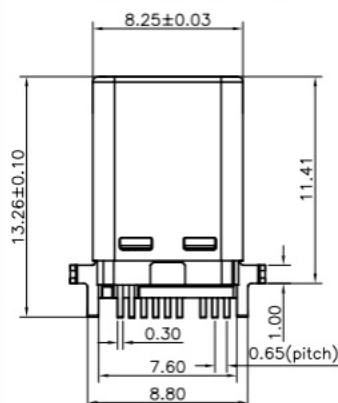

Specification:

- 1.Electrical Characteristics:
Contact Current Rating: 3 Amperes Max.
Rated Voltage: 30V Max.
Dielectric Withstanding Voltage: AC 100V r.m.s.
Insulation Resistance: 100 M Ω Minimum.
Contact Resistance: 40 m Ω Maximum.
- 2.Environmental:
Operating Temperature: $-30^{\circ}\text{C}\sim+85^{\circ}\text{C}$.
- 3.Mechanical Characteristics:
Insertion Force: 20N MAX.
Withdrawal Force: 5~20N.
Durability Cycles: 10000 Cycles.

A12	A11	A10	A9	A8	A7	A6	A5		A3	A2	A1
			VBUS		D-	D+	CC		TX1	TX1	GND
									RX1	RX1	
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

NO.	NAME	DESCRIPTION
5	EMC SPRING	Stainless Steel;T=0.10mm;
4	CONTACT	Copper Alloy;Au1u";
3	LATCH	Stainless Steel;T=0.3mm;
2	HOUSING	LCP Thermoplastic;UL94V=0;
1	SHELL	Stainless Steel;T=0.15mm;

X.	± 0.50	X.*	$\pm 2^{\circ}$	UNITS	Shenzhen Jiatel Hardware Electronics Co.,Ltd
.X	± 0.30	.X*	$\pm 1^{\circ}$	mm	
.XX	± 0.10	.XX*	$\pm 0.5^{\circ}$	MAT'L	TYPE C 9PIN
.XXX	± 0.05				
				FINISH	APPD:
				QTY	CHKD:
					DR:
					DWG NO.: 1080008
					SCALE SHEET REV.
					1/1 1/1 A1