
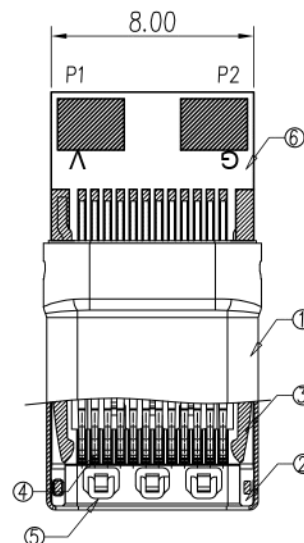
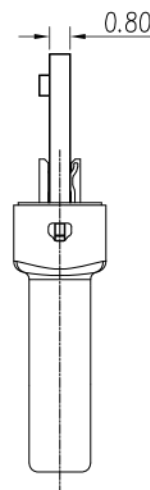
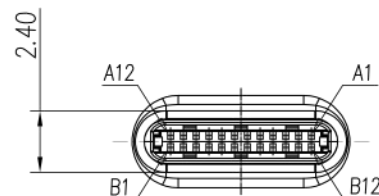
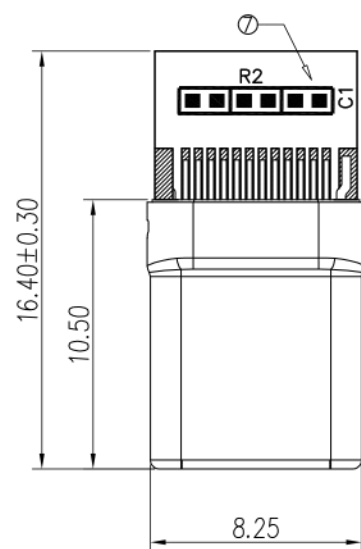


RoHS

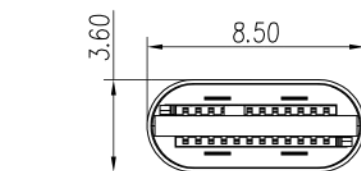

A12	A11	A10	A9	A8	A7	A6	A5	A4	A3	A2	A1
GND			VBUS	SBU1	D-	D+	CC	VBUS			GND
GND			VBUS	Vconn			SBU2	VBUS			GND
B1	B2	B3	B4	B5	B6	B7	B8	B9	B10	B11	B12

R1	56KΩ										
P2	A1,A12,B1,B12,Shell										
P1	A4,A9,B4,B9										

UNITS	SCALE	REV.	SHEET
mm	1:1	B3	1 OF 1
GENERAL TOLERANCE			
X.	±0.30	DR.	
X.X	±0.25	CHK.	
X.XX	±0.20	APPD.	
X.XXX	±0.10		
X.X*	±3°		
X.XX*	±1°		

Specification:

1.Electrical Characteristics:

Contact Current Rating: 3 Amperes Max.

Rated Voltage: 20V Max.

Dielectric Withstanding Voltage: AC 100V r.m.s.

Insulation Resistance: 100 MΩ Minimum.

Contact Resistance: 40 mΩ Maximum.

2.Environmental:

Operating Temperature: -30°C~+85°C.

3.Mechanical Characteristics:

Insertion Force: 5~20Nf.

Withdrawal Force: 8~20Nf.

Durability Cycles: 10,000 Cycles.

NO.	NAME	DESCRIPTION
7	R1	56KΩ
6	P.C.B	FR4
5	EMC SPRING	Stainless Steel; SUS201, T=0.10mm;
4	CONTACT	Copper Alloy; AuNiSn; Au: 1u" T=0.15
3	LATCH	SUS201, T=0.35mm; Sn 80u"
2	HOUSING	LCP Thermoplastic, UL94V-0;
1	SHELL	SUS316, T=0.15mm; NI 50u"

Shenzhen Jiatel Hardware Electronics Co.,Ltd