


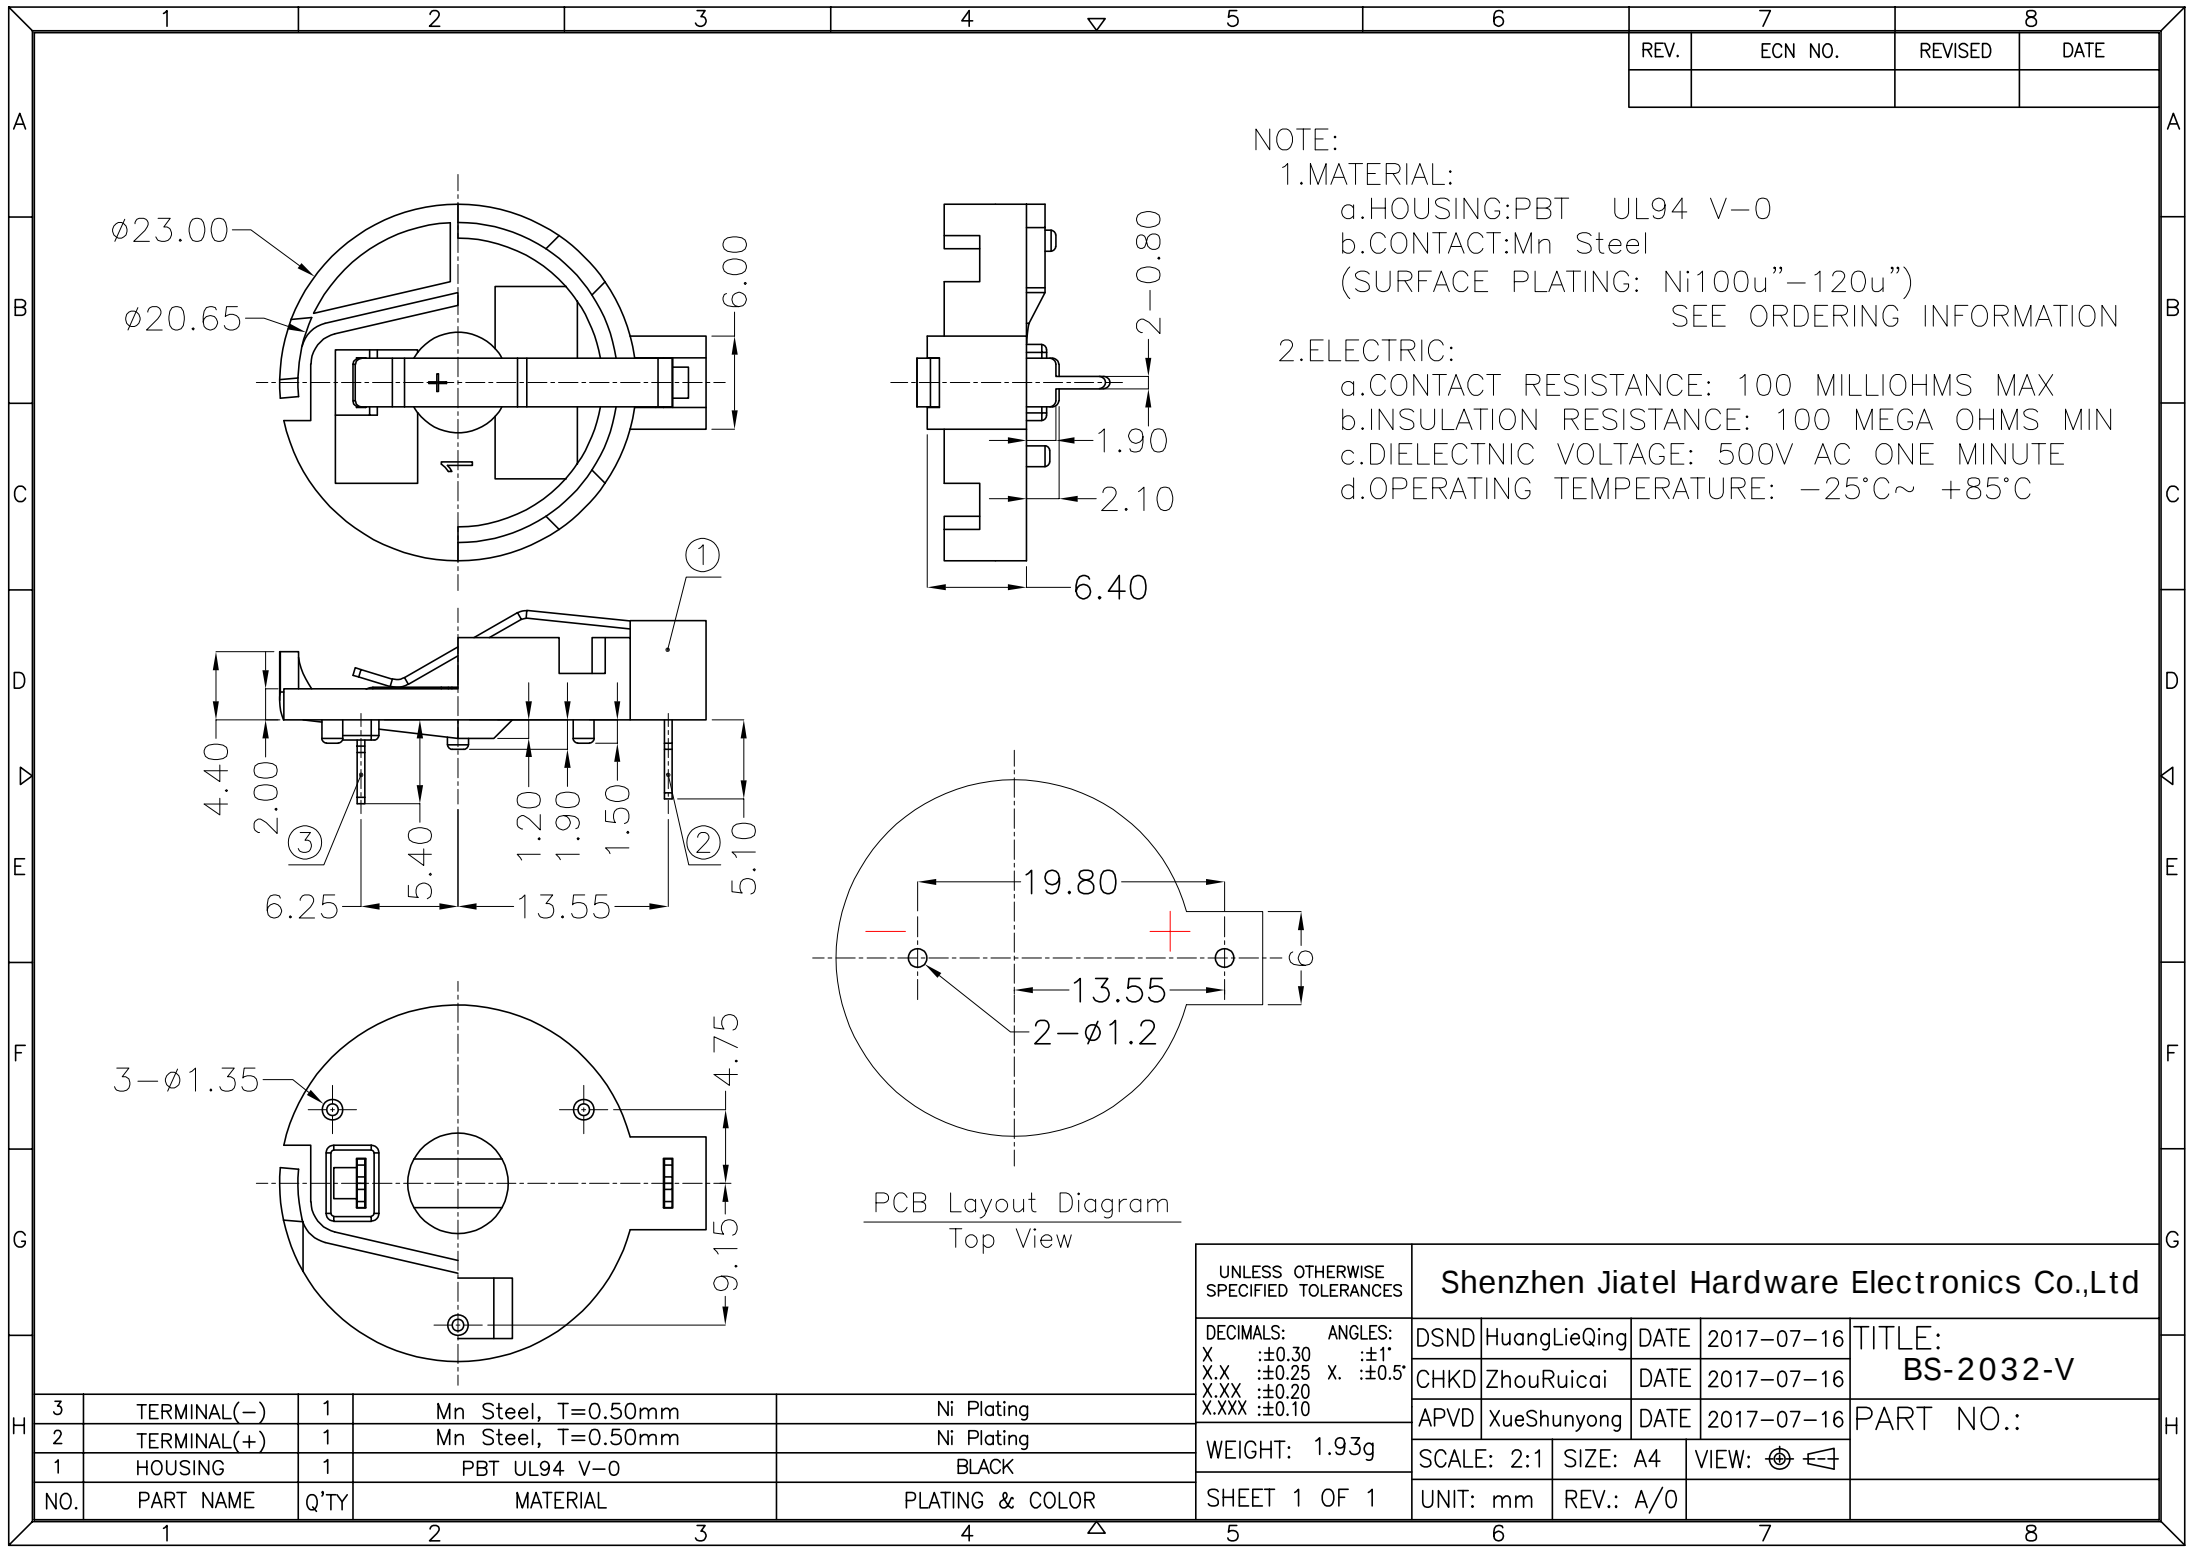

NOTE:
1.MATERIAL:
a.HOUSING:PBT UL94 V-0
b.CONTACT:Mn Steel
(SURFACE PLATING: Ni100u"-120u")
SEE ORDERING INFORMATION
2.ELECTRIC:
a.CONTACT RESISTANCE: 100 MILLIOHMS MAX
b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
d.OPERATING TEMPERATURE: -25°C~ +85°C

PCB Layout Diagram
Top View

3	TERMINAL(-)	1	Mn Steel, T=0.50mm	Ni Plating
2	TERMINAL(+)	1	Mn Steel, T=0.50mm	Ni Plating
1	HOUSING	1	PBT UL94 V-0	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Shenzhen Jiatel Hardware Electronics Co.,Ltd					
DECIMALS:	ANGLES:	DSND	HuangLieQing	DATE	2017-07-16	TITLE: BS-2032-V	
X :±0.30	X :±1°	CHKD	ZhouRuicai	DATE	2017-07-16		
X.X :±0.25	X.X :±0.5°	APVD	XueShunyong	DATE	2017-07-16	PART NO.:	
X.XX :±0.20							
X.XXX :±0.10							
WEIGHT: 1.93g		SCALE: 2:1	SIZE: A4	VIEW:	⊙ ↺		
SHEET 1 OF 1		UNIT: mm	REV.: A/0				