

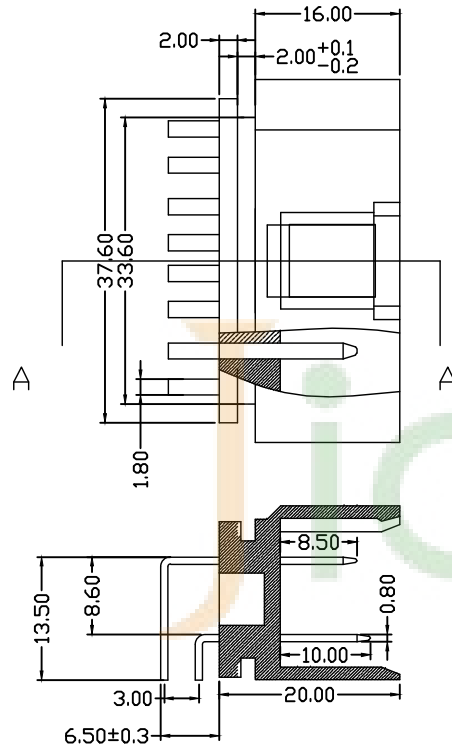


REVISION

NO.	DESCRIPTION	DATE	REV.
1	CHANGE PIN LENGTH	081208	B
2	Add PCB info	20200526	C

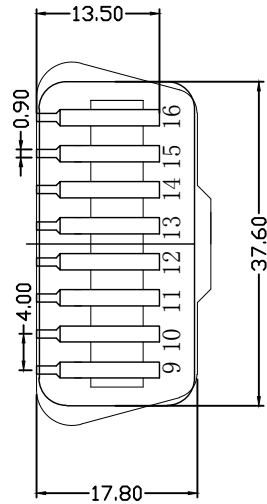

A-A Section

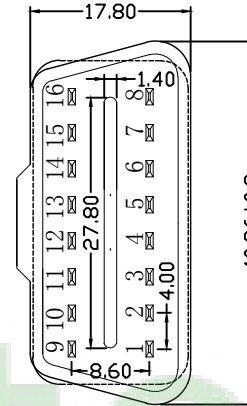


Electrical Performance

1. Dielectric Strength:1000V AC/1 Minute.
2. Contact resistance:100 m Ohm MAX.
3. Insulation Resistance:500VDC, 100M Ohm Min.

Rateing and Application Wire:

1. Rated Volatage: 30V MAX
2. Rated Current: 5Amps, Wire Insulation O.D:Ø1.2-Ø2.6
3. Ambient Temperature Range: -40°C ~+85°C

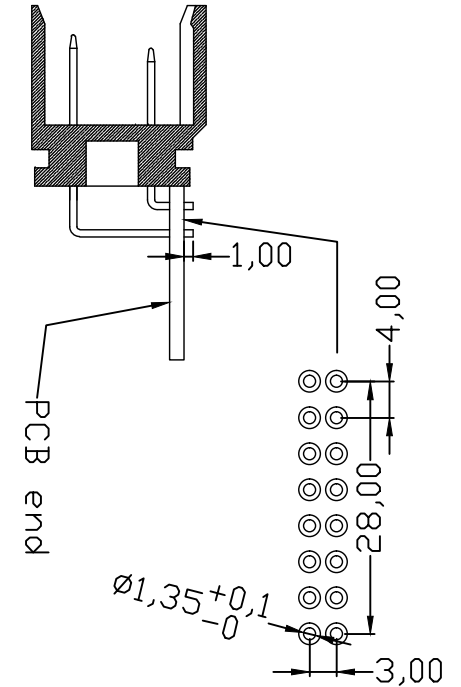

Notes:

1. Housing Material: PA66 plus fiber 15%, Color:Black
2. The Pin 4&PIN 5 Are 10.0mm High Out of The Plastic,
- 3.terminal materi brass gilded
4. General Tolerance: $\pm 0.3\text{mm}$
- 5.Supporting terminal material number:C-OBd-MT-001

Shenzhen Jiatel Hardware Electronics Co.,Ltd

	UNIT: mm	TITLE: □BDII90度产品图		
	DRAWN BY	DATE	CUSTOMER	CUSTOMER P/N
CHECKED BY	DATE	PART NO. CR-PG001	SAMPLE NO.	REV. A
APPROVED BY	DATE	FILE NO:		
SALE BY	DATE			