

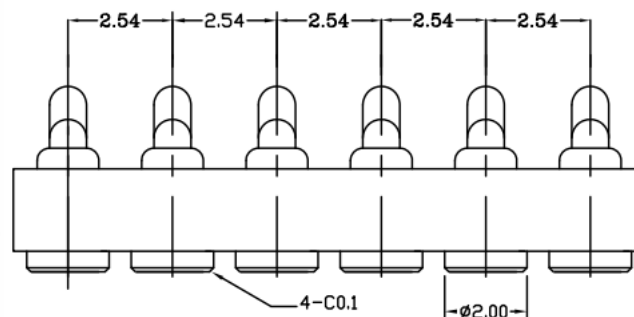
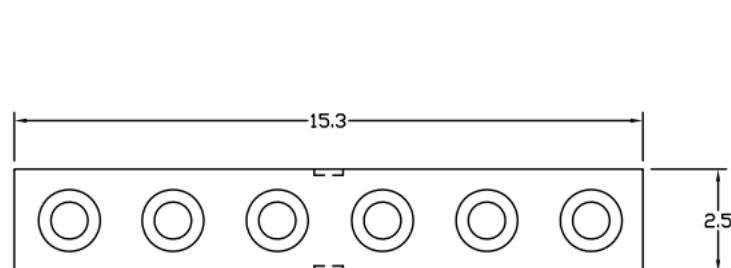
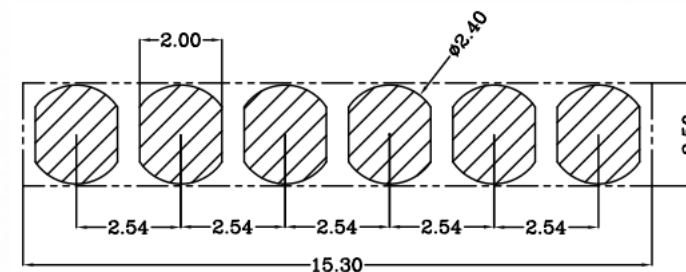



USED ON

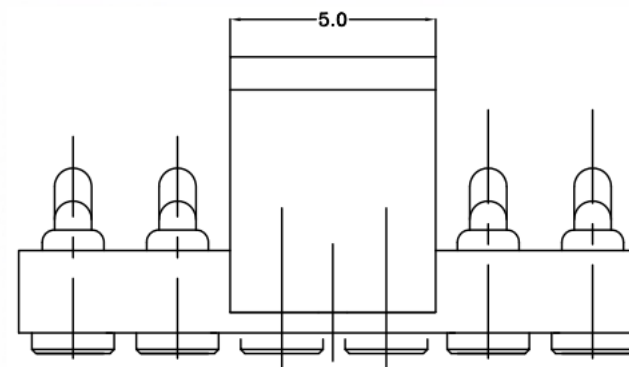

Point

3-80W rkin

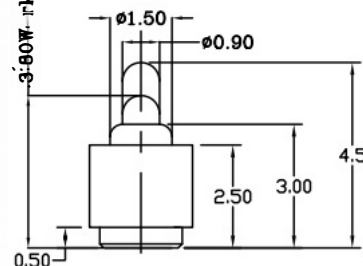

Recommended PCB Layout

Notes:

1 Material, Housing: PA 4.6 (30% Glass Filled)
Color Black.

Contact: Brass

2 Mechanical demands:

Spring force: Min 80g with 0.7mm stroke

Full stroke is 1.0 mm

Plating Plunger: 0.4um Au over 1.4um Ni

Plating Body: 0.1um Au over 1.4um Ni

DIMENSIONS IN MM
TOLERANCES UNLESS
OTHER SPECIFIED
0 = ±
0.0 = ±0.15
0.00 = ±0.10
0.000 = ±
ANGLE: ±4
SURF TEXTURE:
REMOVE BURRS. BREAK
SHARP EDGES R0.05 MAX
DO NOT SCALE PRINT

MATL	HT TR	FIN
DWN	APVD	
CHK	REL	
NAME	BATTERY POGO CONNECTOR 6 POSITIONS PGC-1.5-4.5-R-6P-2.54PH	
SCALE	A4	REV
1:1	DWE NOL	B1

Jiatel
Shenzhen Jiatel Hardware
Electronics Co.,Ltd

100184-6

PART NUMBER

LOC
-
DIST
-

4

3

2

1