

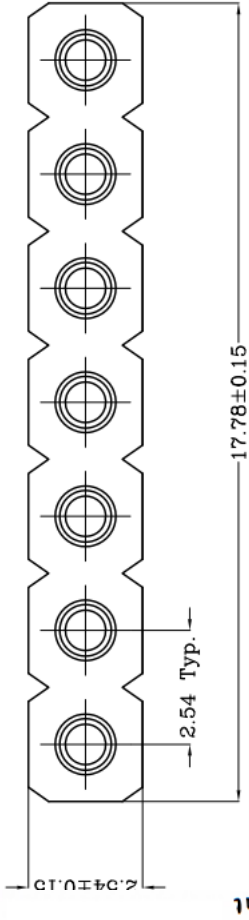


Item	Part name	Qty/Ea'	Material	Finish
1	HSG	1	High temp. Plastic UL94 V-0 Color Black	_____
2	Body	7	Leaded Brass	Au plating over Ni
3	Plunger	7	Leaded Brass	Au plating over Ni
4	Spring	7	Stainless steel wire	_____
5				

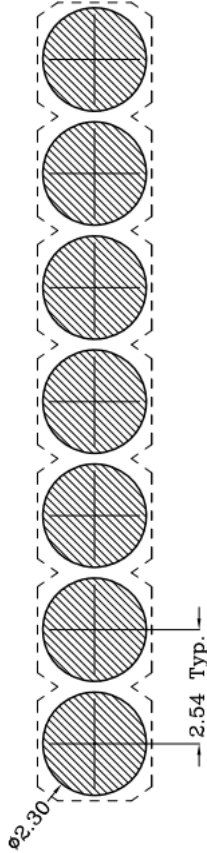

Working height

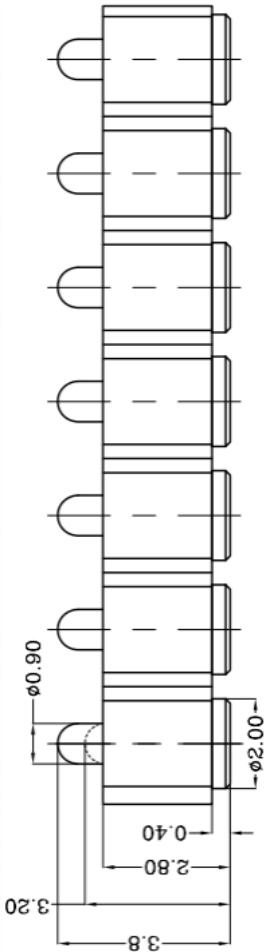

Recommended PCB Layout

Rev.	NEW	Date.
Revision record.	2012/04/17	

DIST

DIST

Table 1 Mechanical performance		
Working height	3.20mm	60gf min <2.1>
Durability	10000cycle	

Notes:

- 1 Demensions shall be interpreted per ASME Y14.5M.
- 2 Mechanical performance(See the table 1)
<2.1>The force is the average of forces obtained when plunger goes downwards and upwards.
- 3 Electrical performance
Resistance: 30mOhm Max.Current rating: 2.0A
- 4 RoHS compliant.

110806-7
PART NUMBER

Customer drawing		Unit	mm	Weight
TWN: QIN Zuozhong	APVD:			
CHK:	REL:			
Name Customer drawing				
Scale 1:1	Size A4	DWG No. JT-PG-2507	Page 1/1	Rev. 1

Jiater
Shenzhen Jiater Hardware
Electronics Co.,Ltd