
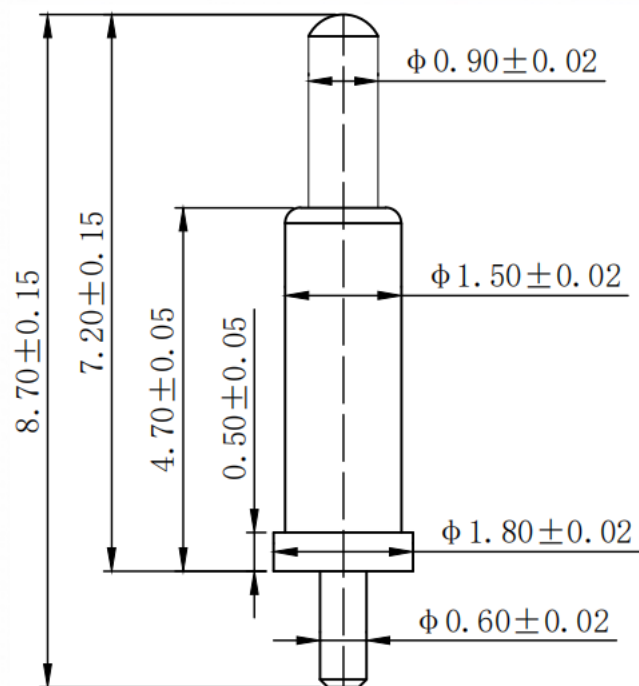


1. Rated voltage: 5V
2. Rated current: 1A
3. Conduction resistance: 30mΩ (maximum)
4. Operating stroke and spring force:
1> Press stroke 1.5mm: 20±10gf
5. Mechanical life:
1> Press stroke 1.5mm (mechanical life cycle): 10,000 cycles (minimum)
6. Operating temperature: -30~85°C
7. Passed CCD test

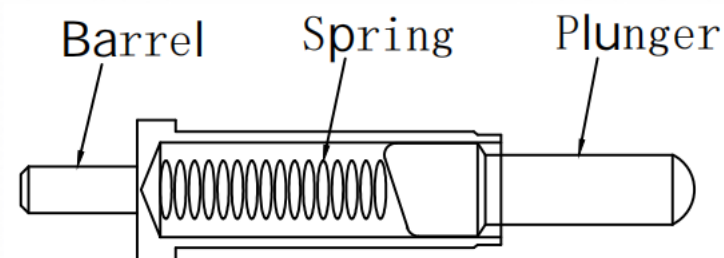

PIN structure

Shenzhen Jiatel Hardware Electronics Co.,Ltd

Des	Material : C3604 AU5U*min stroke 度1.5mm force20gt Salt spray resistance 48H						Ve	Al
Parf No	JT-DIP-1887				Unif	mm	Scale	Free
view		x. ±0.20	x° . ±2					
		.x ±0.15	.x° ±0.5°					
		.xx±0.10						
				2019.07.31				