

REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A0			NEW	2024.03.23	Eric

NOTE:

1.Material

.Cover: Black PA46(UL94V-0)

Plunger: Brass

2.Plating

.Contact surface:3u" minimum Au over 80~100u" Ni

3.Electrical

.Rated Current & Voltage: DC 12V; AC 1A

.Contact Resistance: 25mΩ maximum


4.RoHS COMPLIED PROUCT.

5.Elasticity:Stroke 0mm : 10gfStroke 0.5mm : 100gf Stroke 0.90mm
(or fully compressed) : 160~250gf

6.Life (Million) : stroke range Max 0.5~4mm

Max.Stroke 10000 times

7.Temperature: -40°~150°

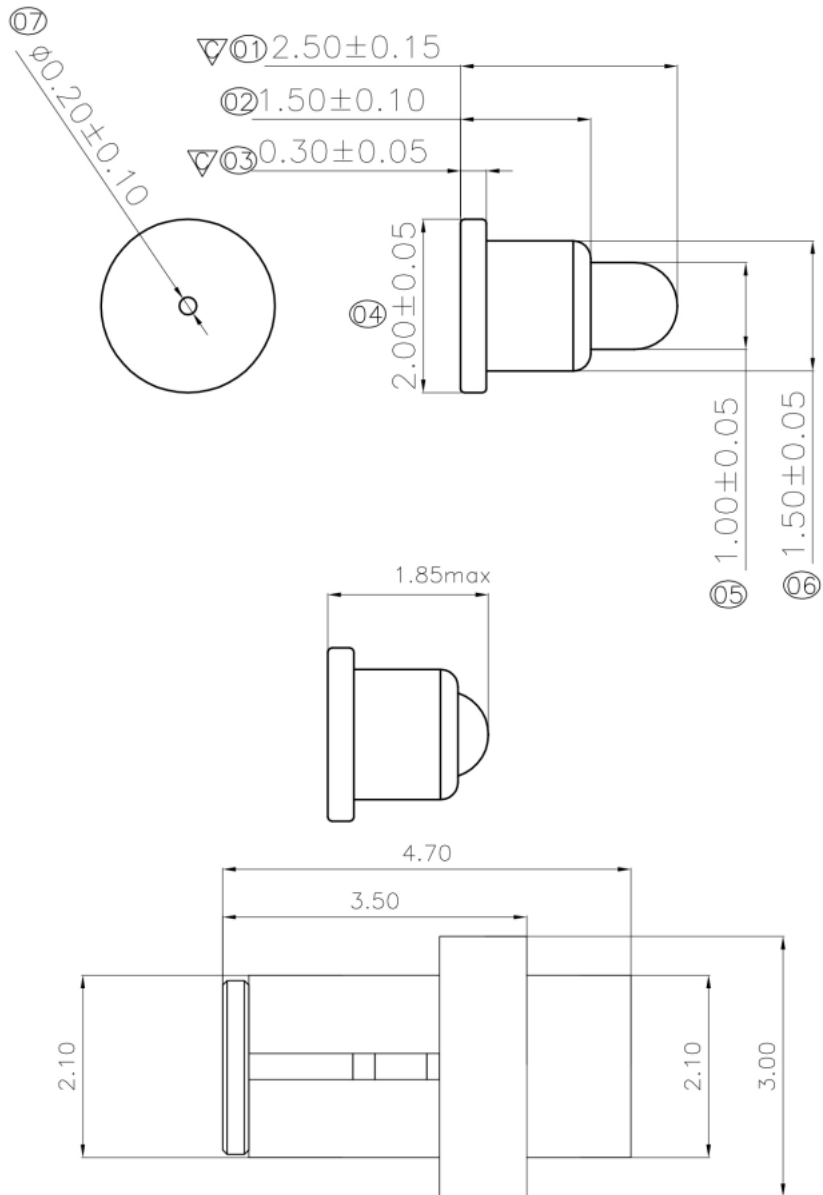

DIM	TOL	DIM	TOL
X.		X"	
X.X	±0.20	X.X"	
X.XX	±0.15	X.XX"	
X.XXX	±0.10	X.XXX"	

Shenzhen Jiatel Hardware Electronics Co.,Ltd

DRAW NO.		DATE	2011.03.23	MATERIAL: SEE NOTE	DRAW NAME:
DESIGN:	Eric			FINISH: SEE NOTE	POGO PIN 2.0*2.5
CHECK:				FILE:	
REVIEW:				P/N.HY90-00019-002	
				REV. A0 SCALE N/A	UNIT: mm SHEET: 1/1