
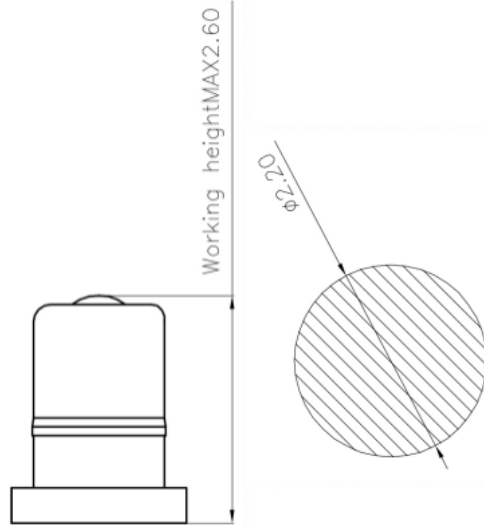


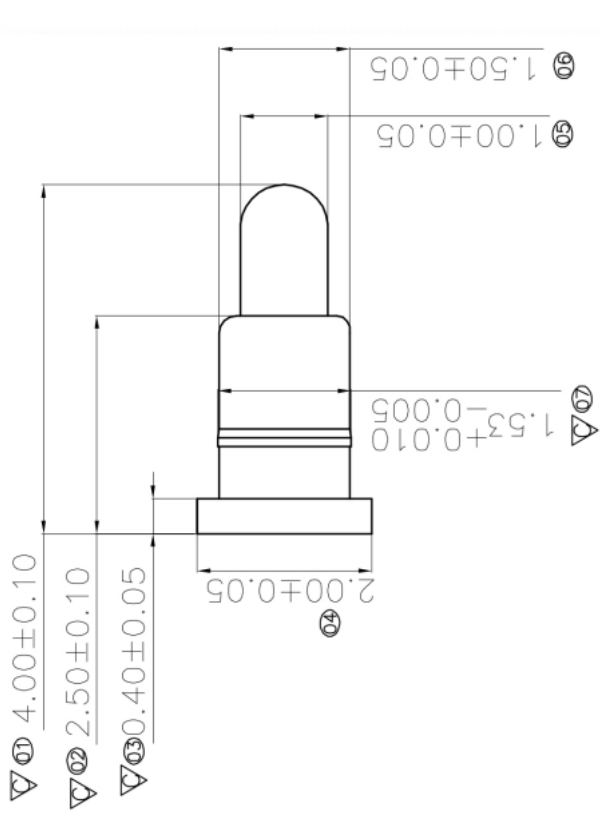

PCB LAYOUT

Layout Tolerance:±0.20mm

NOTE:

1.Material

.Plunger: Brass

2.Plating

.Contact surface:1u" minimum Au over 80~100u" Ni

3.Electrical

.Rated Current & Voltage: DC 12V; AC 1~1.65A,24H

.Contact Resistance: 25mΩ maximum

4.RoHS COMPLIED PROUCT.

5.Elasticity:Stroke 0mm:10gfStroke 0.25mm:50gf Stroke 1.40mm
(or fully compressed):100~150gf

6.Life (Million):stroke range Max0.5~4mm

Stroke 10000 times Minimize Creep deformation within 0.5gf of Touch Down

7.Temperature: -40°~150°

8.Use:Electronic photography: power, mobile phone, antenna, ground, battery contact.

Shenzhen Jiatel Hardware Electronics Co.,Ltd

DRAW NO.	DATE	MATERIAL:Brass C3604	DRAW NAME:
DESIGN: Eric	2012.02.13	FINISH:Au1~3u",Ni,80~120u"	SEE TABLE
CHECK:		FILE:	
REVIEW:		P/N:SEE TABLE	
		REV. AO	SCALE N/A
		UNI :	SHEET: 1/1