



0 1 2 3 4 5 6 7 8 9 10

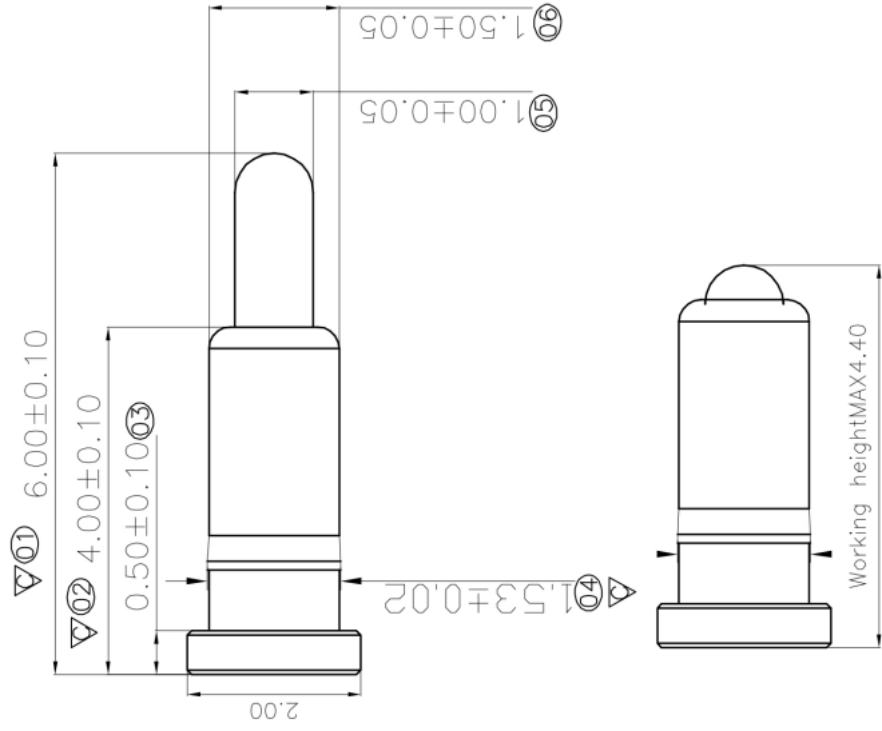

- NOTE:
1. Material
.Plunger: Brass
 2. Plating
.Contact surface: 3u" minimum Au over 80~100u" Ni
 3. Electrical
.Rated Current & Voltage: DC 12V; AC 1~1.65A, 24H
.Contact Resistance: 25mΩ maximum
 4. RoHS COMPLIED PRODUCT.
 5. Elasticity: Stroke 0mm: 10gf Stroke 0.25mm: 50gf Stroke 1.60mm (or fully compressed): 100~150gf
 6. Life (Million): stroke range Max 0.5~4mm
Stroke 10000 times
 7. Temperature: -40°~150°
 8. Use: Electronic photography: power, mobile phone, antenna, ground, battery contact

Shenzhen Jiatel Hardware Electronics Co., Ltd

PCB LAYOUT

Layout Tolerance: $\pm 0.20\text{mm}$

DRAW NO.	DATE	MATERIAL: Brass C3604	DRAW NAME:
DESIGN: Eric	2012.02.13	FINISH: Au3u", Ni.80~120u"	SEE TABLE
CHECK:		FILE:	
REVIEW:		P/N: SEE TABLE	
		REV. A1	SCALE N/A
		UNIT: mm	SHEET: 1/1