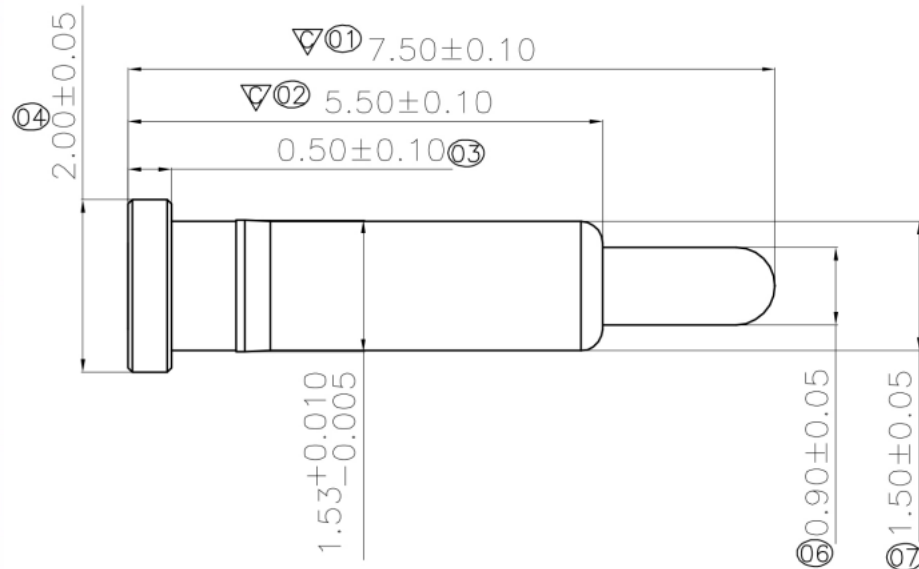


PCB LAYOUT
Layout Tolerance:±0.20mm

- 1.Material
.Plunger: Brass
- 2.Plating
.Contact surface:1u" minimum Au over 80~100u" Ni
- 3.Electrical
.Rated Current & Voltage: DC 12V; AC 1~1.65A,24H
.Contact Resistance: 25mΩ maximum
- 4.RoHS COMPLIED PROUCT.
- 5.Elasticity:Stroke 0mm:10gfStroke 0.25mm:50gf Stroke 1.60mm
(or fully compressed):100~150gf
- 6.Life (Million):stroke range Max0.5~4mm
Stroke 10000 times
- 7.Temperature: -40°~150°
- 8.Use: Electronic photography: power, mobile phone, antenna, ground, battery contact.

Shenzhen Jiatel Hardware Electronics Co.,Ltd

DRAW NO	DATE	MATERIAL:Brass C3604	DRAW NAME:	
DESIGN:	Eric	2012.02.13	SEE TABLE	
CHECK:			FILE:	
REVIEW:			P/N:SEE TABLE	
		REV. A1	SCALE	N/A
		UNIT:	SHEET:	1/1

DIM	TOL	DIM	TOL
X.		X"	3"
X.X	±0.20	X.X"	
X.XX	±0.15	X.XX"	
X.XXX	±0.10	X.XXX"	