


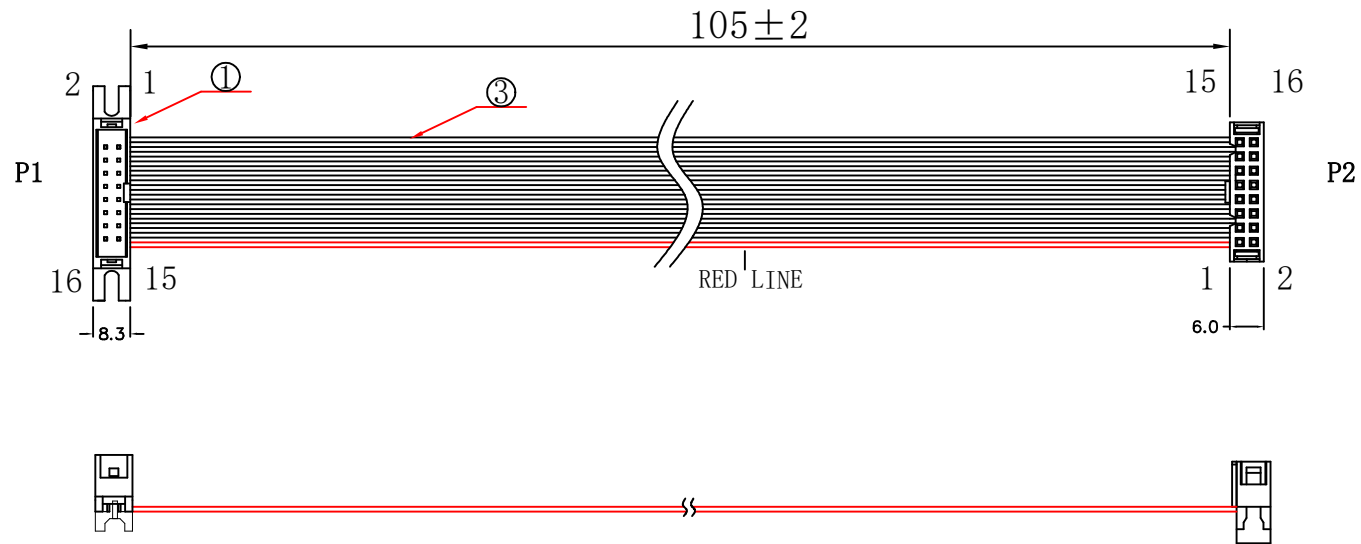

1. When cutting the wire, ensure the wire-sheath ends are cut flush and not skewed.
2. Pay attention to the orientation of both IDC connectors after crimping.
3. Pack in an inner-and-outer K = K export carton, with each layer separated by dividers.
4. Electrical characteristics must meet the following requirements: Withstand voltage 300 V, conductor resistance $\leq 3\ \Omega$, insulation resistance $\geq 10\ \text{M}\Omega$.

接点图:

P1	1	2	3	X	X	X	14	15	16
P2	16	15	14	X	X	X	3	2	1

1	6206-16G01B02 2.54 IDC BOX HEADER 16P 灰色2件式 1PCS PUYER	OPERATION		DRAW	DATE 2022/03/08	SCALE	FIT	Shenzhen Jiatel Hardware Electronics Co.,Ltd
		X.	±0.20			UNIT	mm	
2	6201-16B01BW02 2.54 IDC 16P 黑色2件式 1PCS	X. X	±0.15	CHECK	DATE	SIZE	A4	
3	UL2651 28AWG PH=1.27mm 16C 灰色红边排线 L=120mm 1PCS	X. XX	±0.10	APPROVE	DATE	SHEET	1/1	
4		ANGLES	±2°			PROJ.		