

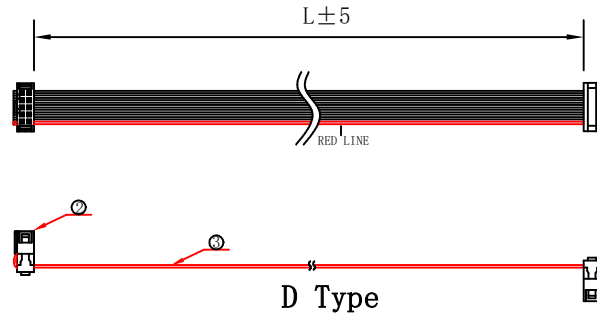
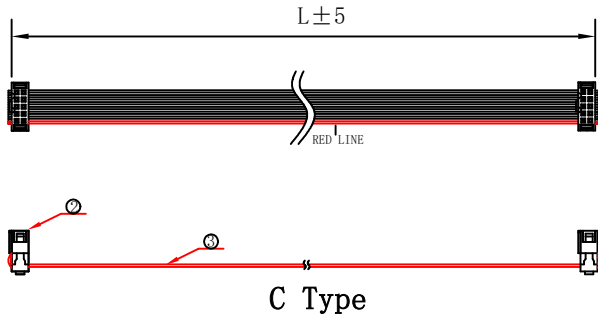
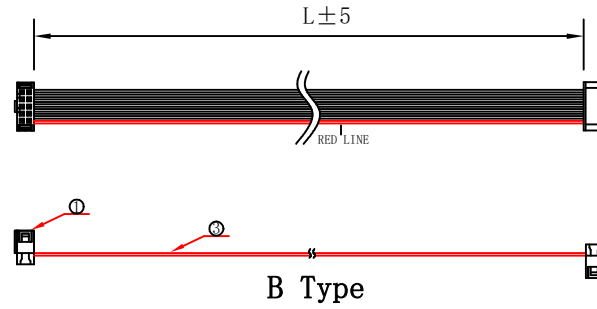


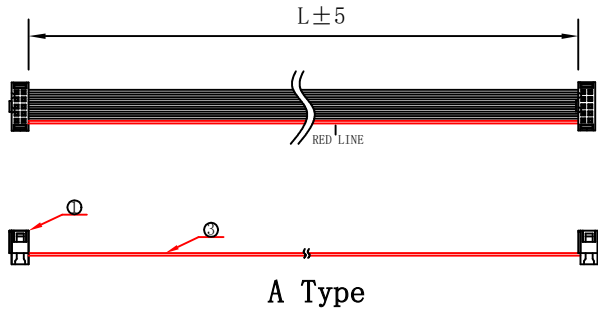

Notes:

- When stripping the wire, the insulation cut must be neat and not skewed .
- Pay attention to the orientation of the IDC connectors at both ends after crimping.
- Pack in inner and outer K=K export cartons.
- Electrical characteristics shall meet the following requirements:
 - Withstand voltage: 300V
 - Conduction resistance: 3Ω
 - Insulation resistance: 10MΩ

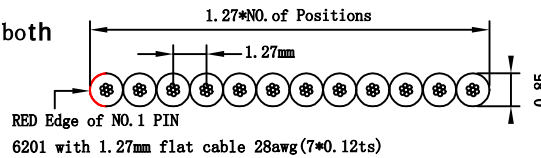

PY6200- XX B A Lxxx				Shenzhen Jiatel Hardware Electronics Co.,Ltd	
Series NO.	No. of Pos	Color Insulator	Cable long		
06P	26P	B=Black G=Grey	mm		
08P	30P				
10P	34P				
12P	36P				
14P	40P	A=A type B=B type C=C type D=D type			
16P	44P				
18P	50P				
20P	60P				
22P	64P				
24P					

1	6201-XXB01BW02 2.54 IDC XXP 黑色2件式 2PCS	OPERATION		DRAW	DATE 2022/03/06	SCALE	FIT	Shenzhen Jiatel Hardware Electronics Co.,Ltd
		X.	±0.20			UNIT	mm	
2	6201-XXB01BW03A 2.54 IDC XXP 黑色3件式 2PCS	X. X	±0.15	CHECK	DATE	SIZE	A4	
3	28AWG PH=1.27mm XXC 灰色红边排线 L=XXXmm 1PCS	X. XX	±0.10	APPROVE	DATE	SHEET	1/1	
		ANGLES	±2°			PROJ.		
		DIM	TOL					