

Specifications

备注 (Remark)

1. 材料 (Matrrial)

 胶芯: PBT/PA9T/LCP+30%G.F UL94V-0, 颜色: 黑色

 Housing: PBT/PA9T/LCP+30%G.F UL94V-0, Color:Black

 端子: 黄铜

 Contact: Brass

2. 特性 (characteristics):

 额定电流: 3.00AMP

 Rating Current:3.00AMP

 接触阻抗: 20mΩ MAX

 Contact Resistance:20mΩ MAX

 绝缘阻抗: 1000MΩ Min







 Insulating Resistance:1000MΩ Min

 耐电压: AC 500V/分钟

 Withstanding Voltage:AC 500V/Minute

 温度范围: -40℃ to +105℃

 Temperture Range:-40℃ to +105℃

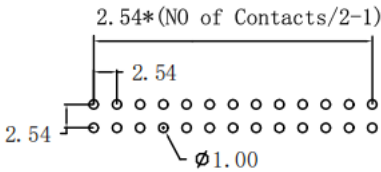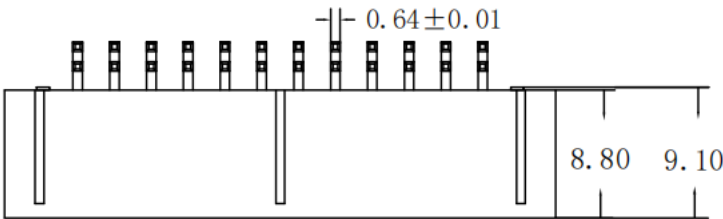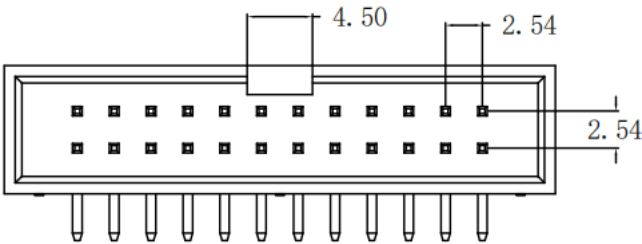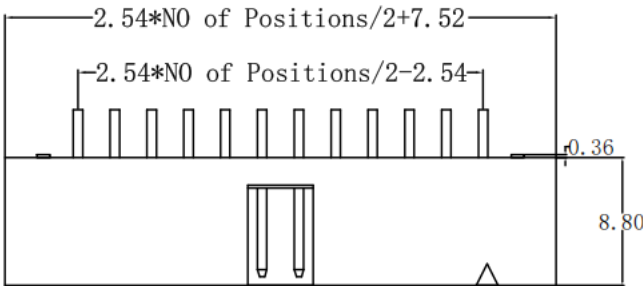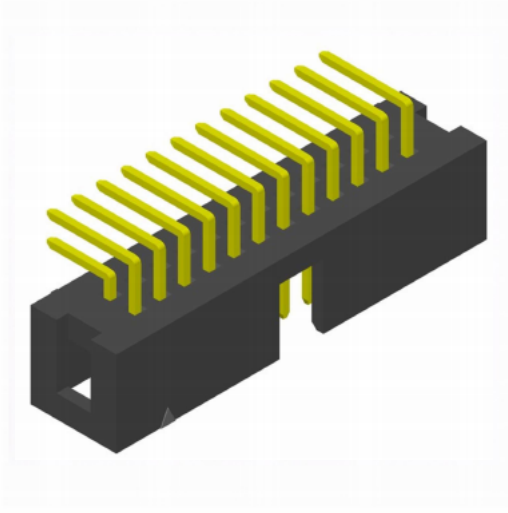

Recommended P.C.
Board Hole Layout

BH2541

X X

X X

A

B

2

Series NO.

No. of Pos
10~64P

Contact Plating

Full Of Gold

A0=0.8u"

A1=3u"

A2=5u"

A3=10u"

A5=15u"

A9=30u"

S1=Full Tinned

Insulator Material:

A: PBT

B: PA6T

C: PA9T

D: LCP

Insulator Color:

B: Black

G: Grey

Packing

1: PE Bag

2: Tray

3: Tube

4: Tape&Reel