


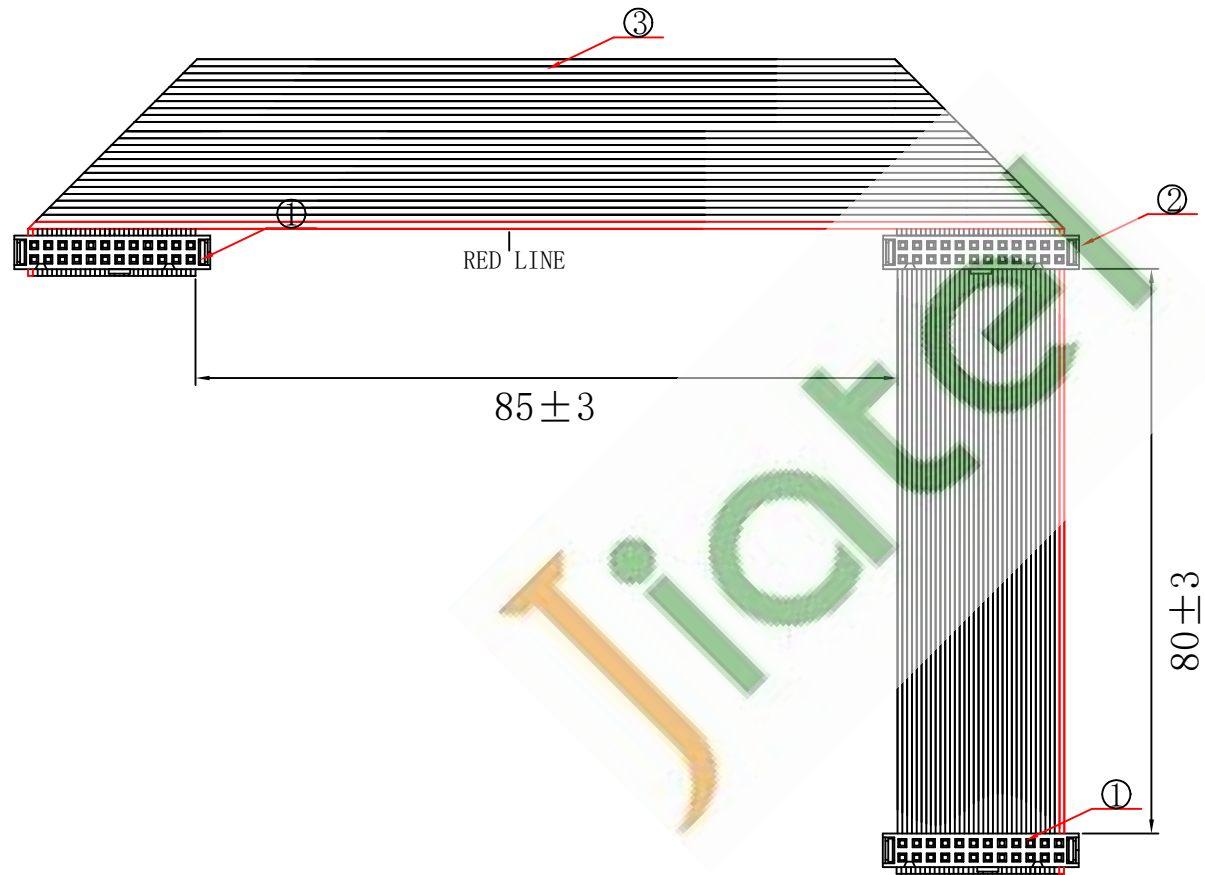

Note:

- 1. When stripping the wire, the insulation cut must be neat and not skewed .
- 2. Pay attention to the orientation of both ends of the IDC connector after crimping.
- 3. Pack in K=K export cartons, with a separator between each layer.
- 4. Electrical characteristics shall meet the following requirements:
 - Withstand voltage: 300V
 - Conduction resistance: 3Ω
 - Insulation resistance: 10MΩ

1	6201-24B01BW03A PUYER PH=2.54 IDC 24PIN	OPERATION		DRAW	DATE 2022/06/24	SCALE	FIT	Shenzhen Jiatel Hardware Electronics Co.,Ltd
		X.	±0.20			UNIT	mm	
2	6201-24B01BW03A PH=2.54 IDC 24PIN	X. X	±0.15	CHECK	DATE	SIZE	A4	
3	28AWG PH=1.27mm 24C 灰色红边排线 L=268mm 1PCS	X. XX	±0.10	APPROVE	DATE	SHEET	1/1	
4		ANGLES	±2°			PROJ.		
		DIM	TOL					