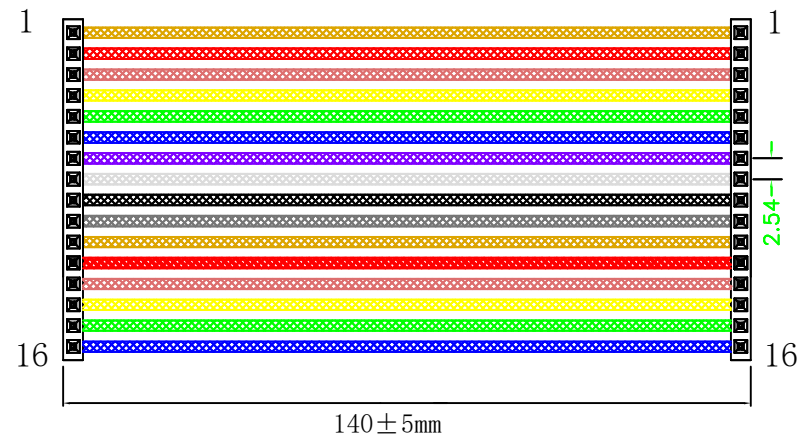


Notes:

1. When stripping the wire, the insulation cut must be neat and free from skewing.
2. Pay attention to the orientation of the IDC connectors at both ends after crimping.
3. Pack in K=K export cartons, with a separator placed between each layer.
4. Electrical characteristics shall comply with the following requirements:
 - Withstand voltage: 300V
 - Conduction resistance: 3Ω
 - Insulation resistance: $10M\Omega$

接点图:

P1	1	2	3	X	X	X	14	15	16
P2	1	2	3	X	X	X	14	15	16

1	2.54mm 单排 IDC 16PIN G/F 2PCS	OPERATION		DRAW	DATE 2016/10/20	SCALE	FIT	Shenzhen Jiatel Hardware Electronics Co.,Ltd
		X.	± 0.20			UNIT	mm	
2	28AWG PH=2.54mm 16C 彩色排线 L=140mm 1PCS	X. X	± 0.15	CHECK	DATE	SIZE	A4	
3		X. XX	± 0.10	APPROVE	DATE	SHEET	1/1	
		ANGLES	$\pm 2^\circ$			PROJ.		