


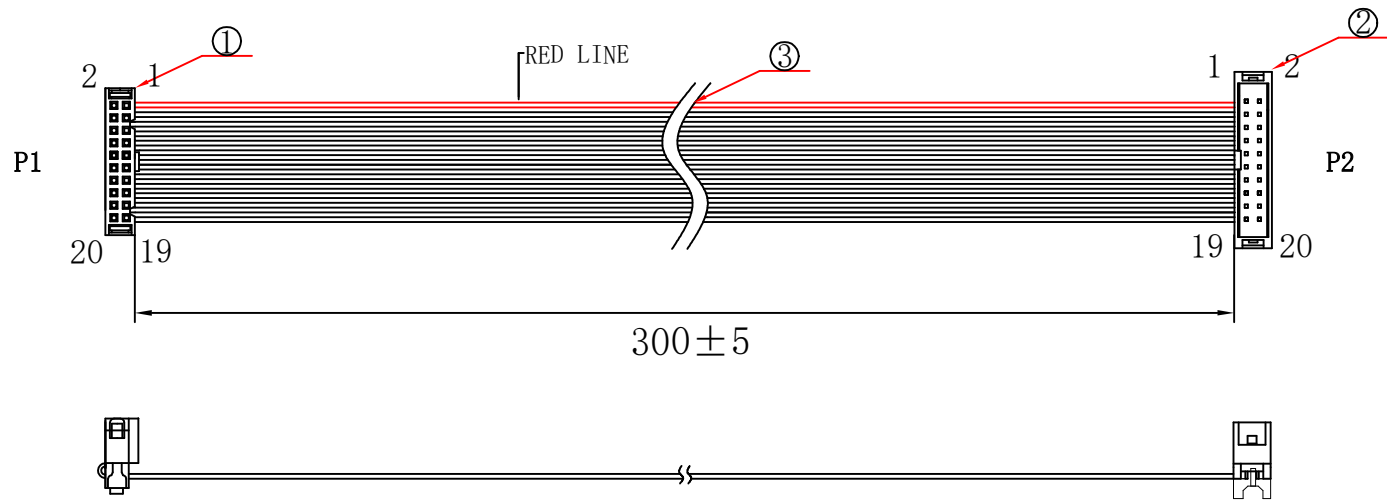

Note:

- When stripping the wire, the insulation cut must be neat and not skewed.
- Pay attention to the orientation of both ends of the IDC connector after crimping.
- Pack in K=K export cartons, with a separator between each layer.
- Electrical characteristics shall meet the following requirements:
Withstand voltage: 300V
Conduction resistance: 3Ω
Insulation resistance: 10MΩ

CPC P/N: ACA03012006-001

产品料号: ZZ-002

接点图:

P1	1	2	3	X	X	X	18	19	20
P2	1	2	3	X	X	X	18	19	20

1	6201-20B01BW03A 2.54 IDC 20P 黑色3件式 1PCS	OPERATION		DRAW	DATE 2021/11/23	SCALE	FIT	Shenzhen Jiatel Hardware Electronics Co., Ltd
		X.	±0.20			UNIT	mm	
2	6206-20G01B01 2.54 IDC BOX HEADER 20P 灰色2件式 1PCS PUYER	X. X	±0.15	CHECK	DATE	SIZE	A4	
3	28AWG PH=1.27mm 20C 灰色红边排线 L=325mm 1PCS	X. XX	±0.10	APPROVE	DATE	SHEET	1/1	
4		ANGLES	±2°			PROJ.		
		DIM	TOL					