

REV.	ECN NO.	REVISED	DATE

NOTE:

1.MATERIAL:

- a.HOUSING:PBT UL94 V-0 BLACK
- b.CONTACT:PHOSPHOR BRONZE
(SURFACE PLATING: Ni100U"~120U")

SEE ORDERING INFORMATION

2.ELECTRIC:






- a.CONTACT RESISTANCE: 50 MILLIOHMS MAX
- b.INSULATION RESISTANCE: 100 MEGA OHMS MIN
- c.DIELECTNIC VOLTAGE: 500V AC ONE MINUTE
- d.OPERATING TEMPERATURE: -25℃~ +85℃

PLATING:

- A-Au1U"
- J-Ni100U"~120U"
- K-Sn100U"~120U"

MATERIAL:

- 1A-PBT BLACK
- 1B-PA66 BLACK
- 2A-PPA BROWN
- 2B-PPA BLACK
- 3A-PPS BROWN
- 3B-PPS BLACK
- 4A-LCP WHITE
- 4B-LCP BLACK

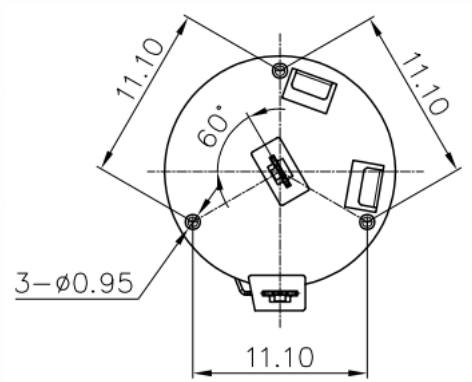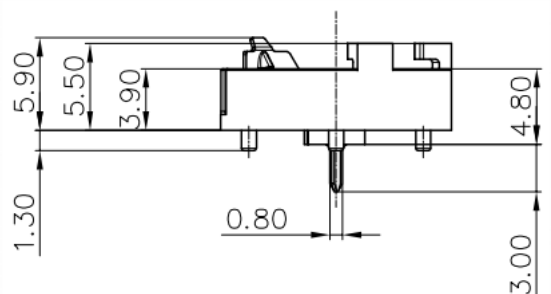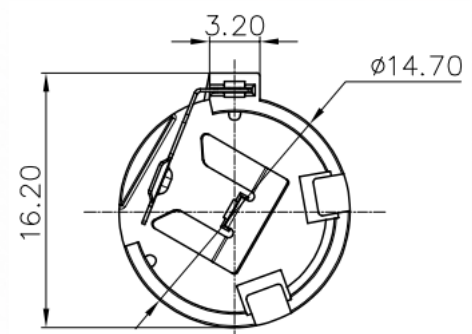

PCB Layout Diagram
Top View

③	TERMINAL(-)	1	PHOSPHOR BRONZE, T=0.20mm	Ni-Plating
②	TERMINAL(+)	1	PHOSPHOR BRONZE, T=0.20mm	Ni-Plating
①	HOUSING	1	PBT UL94 V-0	BLACK
NO.	PART NAME	Q'TY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES		Shenzhen Jiatel Hardware Electronics Co.,Ltd					
DECIMALS: X ±0.30 X ±1 X.X ±0.5 X.XX X.XXX		DSND	Huonglieqing	DATE	2025-01-12	Title	
		CHKD	ZhouRuicai	DATE	2025-01-12	BS-1220-DIP-Z	
		APVD	XueShunyong	DATE	2025-01-12	PART NO.:	
WEIGHT:		SCALE:		SIZE: A4	VIEW:	JT-BSH-1220-KS1056-THM-Z	
SHEET 1 OF 1		UNIT: mm		REV.: A/0	OBJECT: MY		